


RECOMMENDED PAD LAYOUT
(FOR REFERENCE)

- 备注:
1. 塑胶材质: LCP UL 94V-0 BLACK;
 2. 毛边最大0.03mm, 厚0.05mm;
 3. 产品不可有明显的缩水, 烧焦, 发白, 缺胶, 端子包胶等问题;
 4. 零件必须符合RoHS要求;
 5. ▼符号为QIP管控尺寸;
 6. 模穴号 (A, B, C.....);
 7. 中转收料10K PCS/盘;
 8. 产品几何中心位置不能设顶出位;
 9. 端子接地片共面度在0.05mm以内, 正位度0.02mm以内;
 10. 进胶口采用底部细水口进胶;

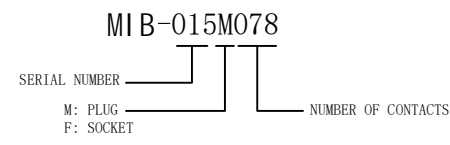

X,±	X°,±	UNITS mm	NAME (INTENDED USE)	东莞市铭标电子科技有限公司			
.X± 0.05	.X°± 1°	MAT'L	PART NO. (INTENDED USE)	TITLE: I/M			
.XX± 0.02	.XX°± 0.5°	N/A	APPD:	DWG NO.: MIB-015M078			
.XXX± 0.015	.XXX°±	FINISH N/A	Q'TY N/A	CHKD:	SCALE SHEET REV.		
THE GENERATED DRAWING IS BY ACAD, PROE OR IDEAS. DO NOT CHANGE BY HAND.			DR:	DR:	1:1	1/1	A