
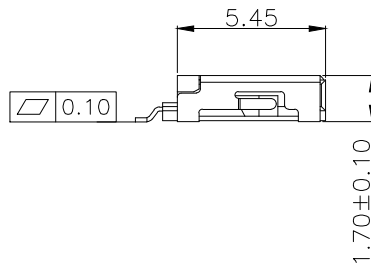
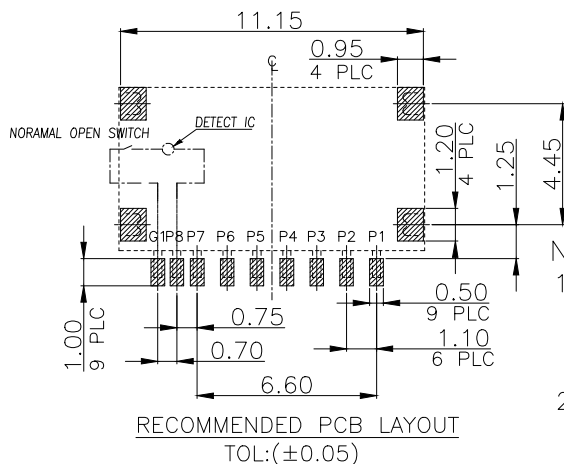
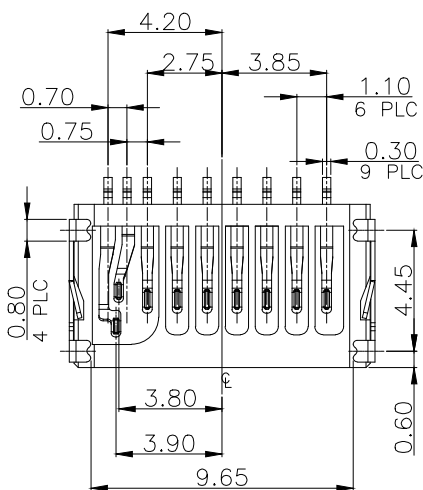
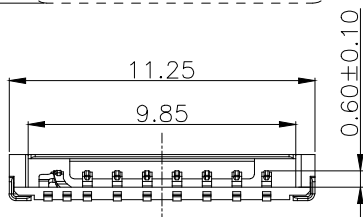


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A0		NEW	2017/10/08

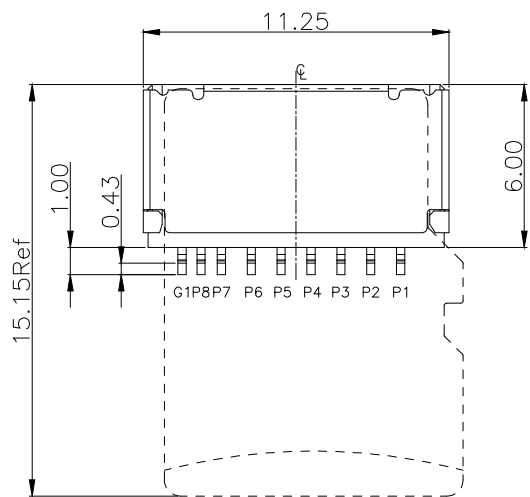

NOTES:

1) MATERIAL:

Housing: LCP-S475 Black UL 94V-0
Contact: C5210,T=0.15
Shell: SUS201 ,T=0.15

2) FINISH :

Contact: Nickel plated overall 30u"Min;
Contact with gold plated 1 u"Min;
Welding foot gold-plated 1 u".
Shell: Nickel plated overall 50u"Min; Welding foot gold-plated 1 u"


3) MECHANICAL REQUIREMENT

Insertion force: 0.5N MIN

4) PART NO.:

C-D3 09 170 A2-1

C: CARD TYPE
D3: MICRO SD CARD
09: 9Pin
170: 1.70 HEIGHT
A2: SERIAL NUMBER
1: GOLD PLATED G/F



P8	DAT1
P7	DAT0
P6	VSS
P5	CLK
G1	SWITCH
P4	VDD
P3	CMD
P2	CD/DAT3
P1	DAT2
PIN NUMBER	PIN NUMBER

GENERAL TOLERANCE		DWG NO.	APPD:	SCALE
X.±0.45	x.'±5°	TITLE		1:1
.X±0.35	.x'±2°	T-T-FLASH CONN 1.7H (SIMPLE SWITCH TYPE2)	CHKD:	UNIT mm
.XX±0.25	.xx'±1°	PART NO.	DR: 彭善平	
.XXX±0.15	.xxx'±0.5°	C-D309170A2-1	DATE 2017/10/08	
SHEET	1/1	东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.		