



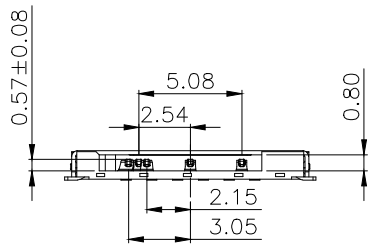
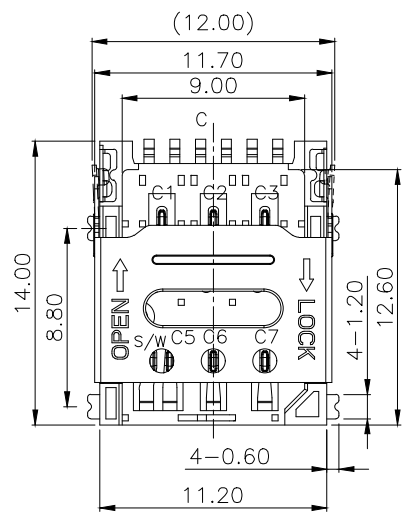




REV.	ECN.NO.	MODIFY.CONTENT	DATE

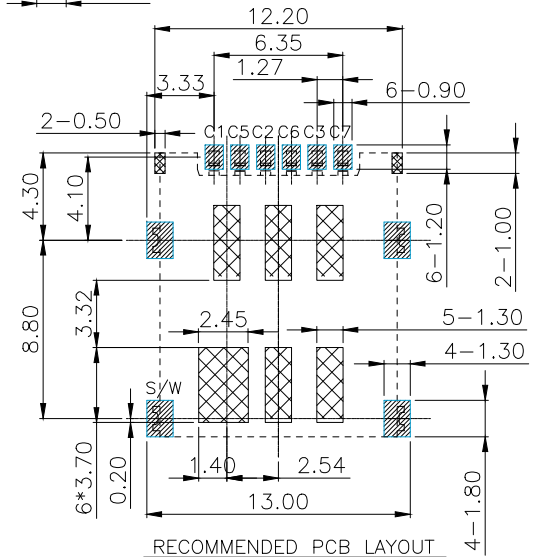

PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	Switch Pin

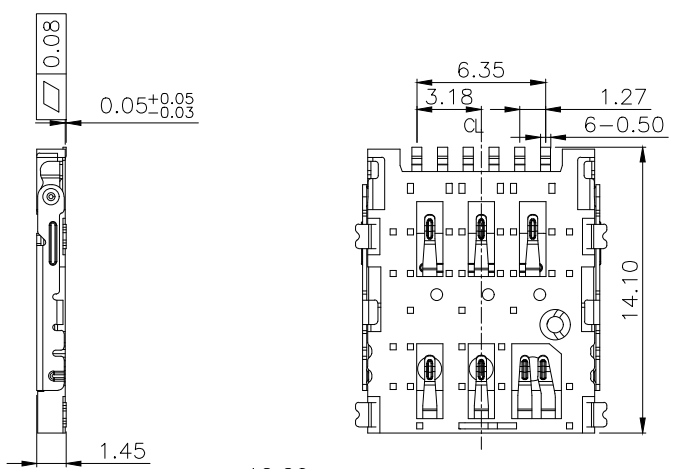

RECOMMENDED PCB LAYOUT  
TOLERANCE ±0.05  
▨ SMT SOLDER AREA  
▩ NO COPPER AREA

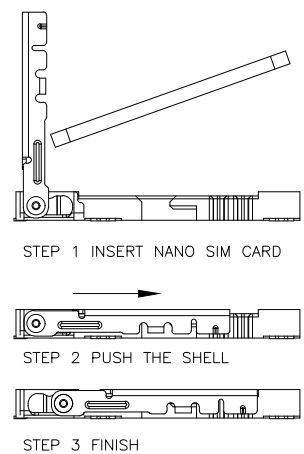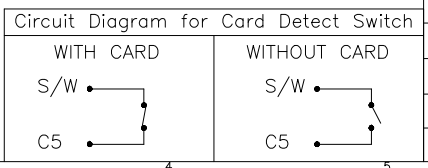

NOTES:

- 1) 材质:  
主体: LCP S475 UL 94V-0  
端子: C5210-EH,T=0.15  
壳子: SUS201-3/4H,T=0.20
- 2) 电镀:  
端子: 整体镀镍底30u", 触点刷金1u", 焊脚刷金1u"  
外壳: 整体表面清洗即可.
- 3) 料号说明:

C-S4 07 145 A1-1  
C: CARD TYPE | 07: 7Pin | 145: 1.45 HEIGHT | A1: SERIAL NUMBER | 1: GOLD PLATED G/F  
S4: NANO SIM CARD

GENERAL TOLERANCE		图号	设计	彭善平	比例	1:1
.X±0.35	x.'±5°	品名	NANO SIM 7PIN 1.45H		单位	mm
.X±0.30	.x'±2°		带侦测PIN 掀盖式 卡座		视角	⊙
.XX±0.25	.xx'±1°	料号	C-S407145A1-1		版本	A0
.XXX±0.15	.xxx'±0.5°		日期	2017/12/16	审核	
页号	1/1	东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				