

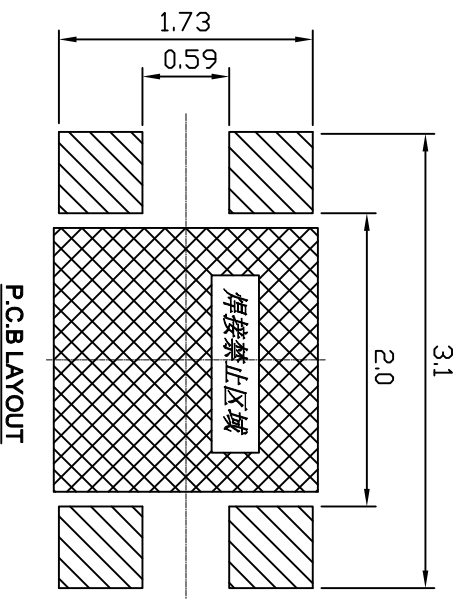
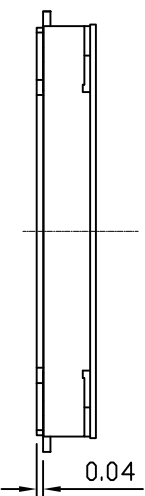



本公司智慧财产未经许可不得复制  
Ming Biao copyright may not be used without permission from ming biao.

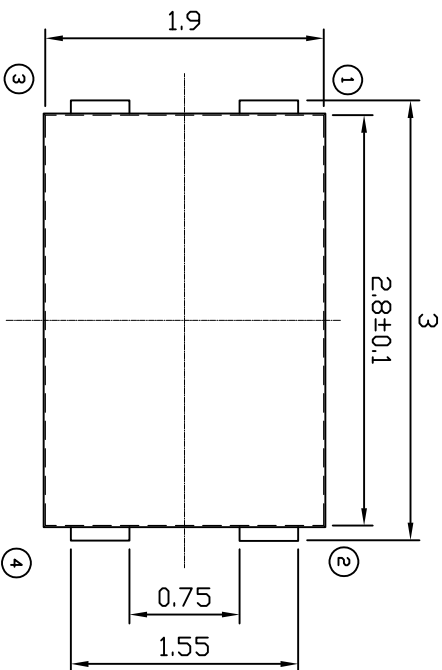

### SPECIFICATIONS:

Operating temperature range:  $-30^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
Rating: Max 50 mA 12V DC Min 10  $\mu\text{A}$  1V DC  
Insulation resistance: 100M $\Omega$  min. 100V DC  
Dielectric strength: 100V AC, 1Min  
Contact resistance: 100m $\Omega$  Max  
Life: 300,000 Cycles  
Travel: 0.15 $\pm$ 0.05mm  
Operating force: 160 $\pm$ 50gf



RÖHS COMPLIANT		Ro-Free		HS Antigen Free		东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.	
TOLERANCE				DESIGN		DATE	
UNLESS OTHERWISE STATED				9999		2024.03.26	
XX	±0.20	SIZE	A4	CHKD	DATE	TITLE	
XX	±0.15	REV	A	APPD	DATE	Tact Switch	
XXX	±0.10	UNIT	mm			SHEET	MODEL
✓	±2°	SCALE	20:1			PRINT DATE	TAF02-NWJ-R-C
						1/3	

