

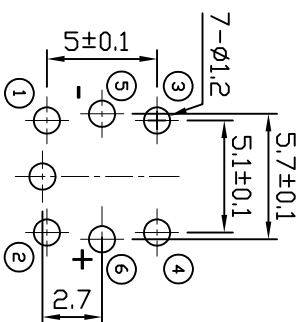
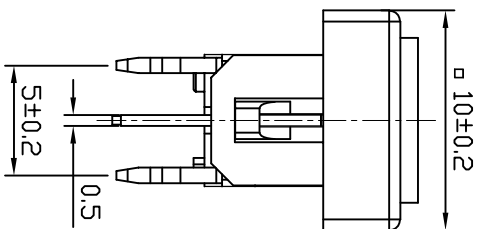



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

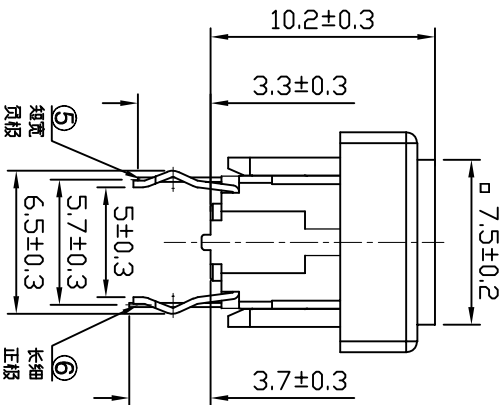

P.C.B LAYOUT



CIRCUIT

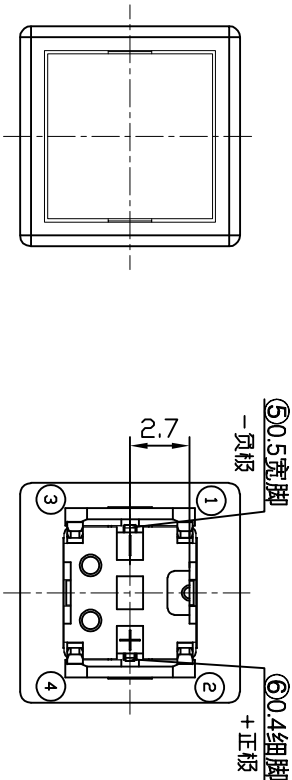

SPECIFICATIONS:

Operating temperature range: -25℃to+75℃
Rating:30V DC, 30mA
Insulation resistance:100MΩ min.100V DC
Dielectric strength:250V.AC.1Min
Contact resistance:50mΩ Max
Life:100,000 Cycles
Travel:0.25±0.1mm
Operating force:160±50gf

灯光	灯光代码
白光	W/white
红光	R Red
绿光	G Green
黄光	Y Yellow
平光蓝	BL1 Blue
..	



RÖHS COMPLIANT Pb-free RoHS				Ming Biao 铭标			
TOLERANCE				DESIGN			
UNLESS OTHERWISE STATED				DATE			
XX	±0.20	SIZE	A4	CHKD	DATE	TITLE	Illuminated Switch
XX	±0.15	REV	A	APPD	DATE	MODEL	LSP637-102J-R
XXX	±0.10	UNIT	mm			SHEET	1/3
	±2°	SCALE	3:1			PRINT DATE	2025.02.11

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.