


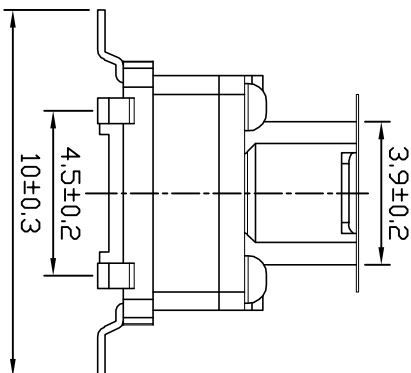
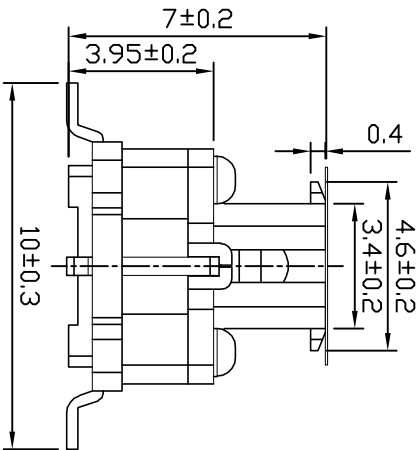


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

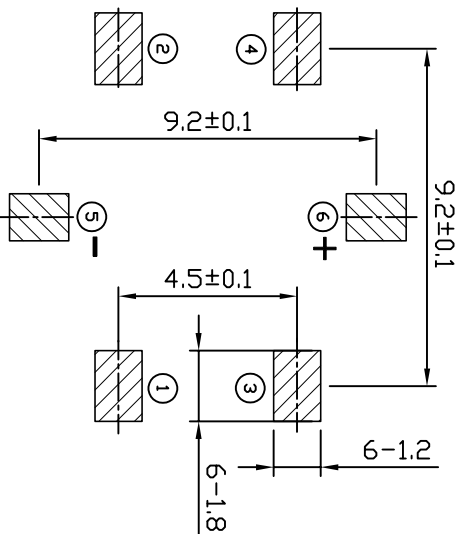

CIRCUIT

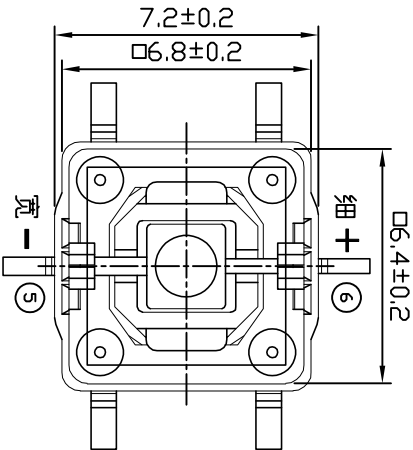

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range:-25℃to+75℃
Rating:30V DC, 30mA
Insulation resistance:100MΩ min, 100V DC
Dielectric strength:250V.AC, 1min
Contact resistance:50mΩ Max
Life:100, 000 Cycles
Travel:0.25±0.1mm
Operating force:160±50gf

F	灯光	灯光代码
	白光	W/white
G	红光	R Red
	绿光	G Green
	黄光	Y Yellow
H	蓝光	BL Blue
	..	



R&D COMPLIANT Pb-free RoHS				Ming Biao 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	
UNLESS OTHERWISE STATED				WYJ	2024.06.21	Illuminated Switch	
XX	±0.20	SIZE	A4	CHKD	DATE	MODEL	SLM711-070J-R
XXX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
	±2°	SCALE	5:1			PRINT DATE	2025.02.11