
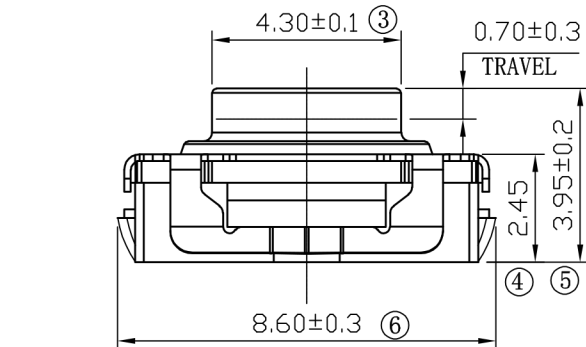
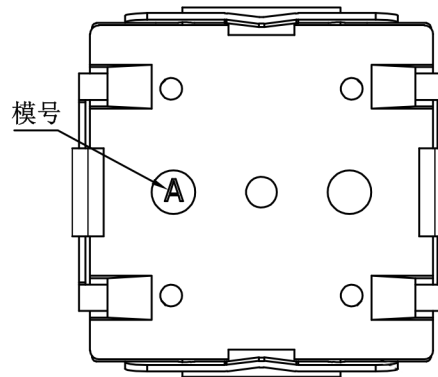
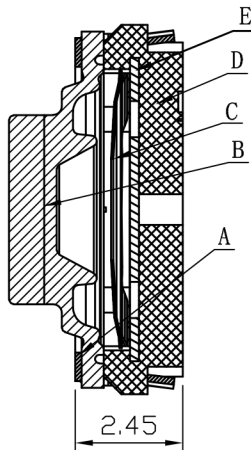


P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -40°C to +90°C
Rating: 50mA, 16V DC Max
Insulation resistance: 100MΩ min, 100V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100mΩ Max
Life: 500,000 Cycles
Travel: 0.7±0.3mm
Operating force: 400±100gf

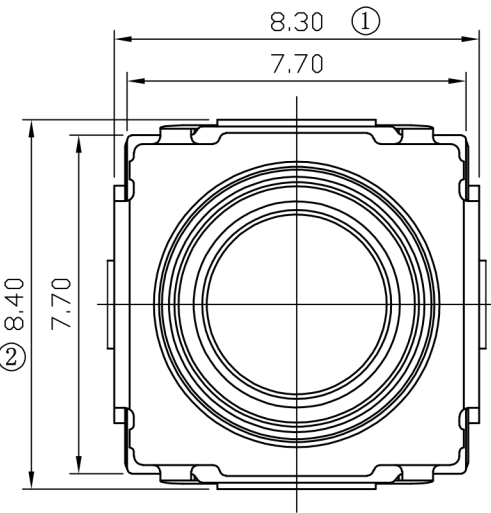

 RoHS COMPLIANT  Pb-Free  HF Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.							
TOLERANCE				DESIGN		DATE		TITLE		Tact Switch	
UNLESS OTHERWISE STATED				WYJ		2024. 09. 27					
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL		TVCU66-Y4AP	
X.XX	±0.15	REV	A								
X.XXX	±0.10	UNIT	mm	APPD		DATE		SHEET		1/3	
	±2°	SCALE	6:1					PRINT DATE		2025.02.11	
											