
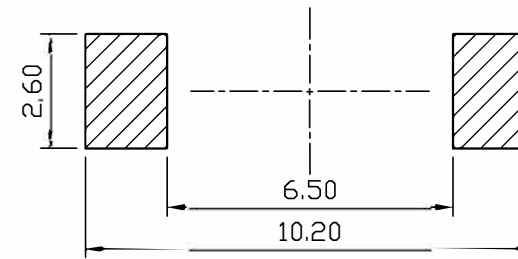
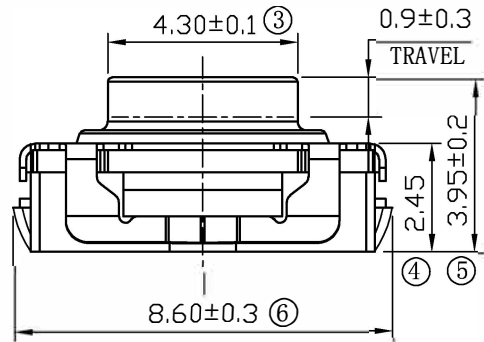
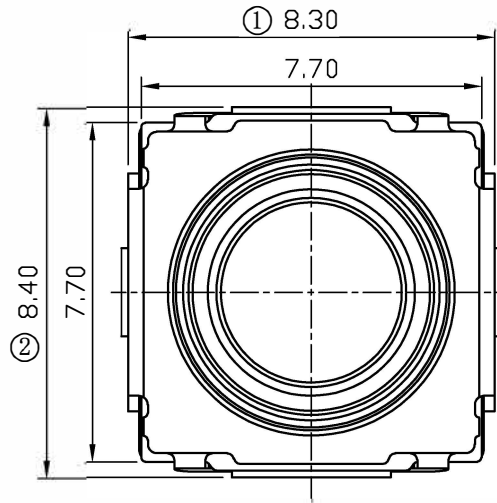
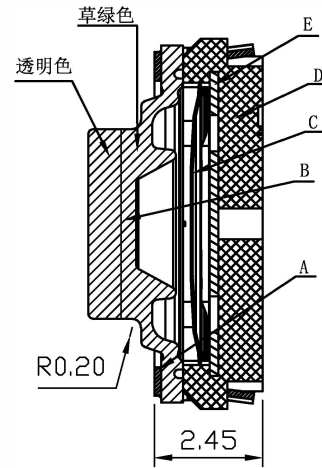


本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.



P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range:-40℃to+90℃
Rating:50mA, 16V DC Max
Insulation resistance:100MΩ min. 100V DC
Dielectric strength:250V AC for 1Min
Contact resistance:100mΩ Max
Life:500,000 Cycles
Travel:0.9±0.3mm
Operating force:700±100gf



RoHS COMPLIANT Pb Pb-Free H Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co.,Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch	
UNLESS OTHERWISE STATED				WYJ	2024. 09. 27			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVCU66-Y7AG	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
	±2°	SCALE	6:1			PRINT DATE	2025.02.11	