

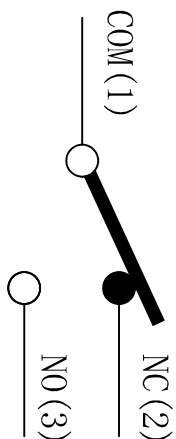
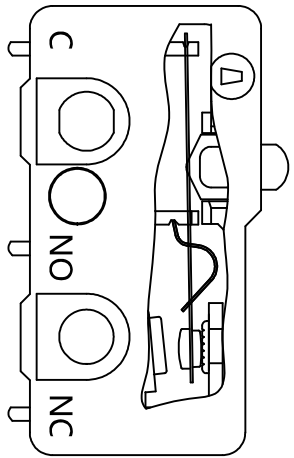


12345678910

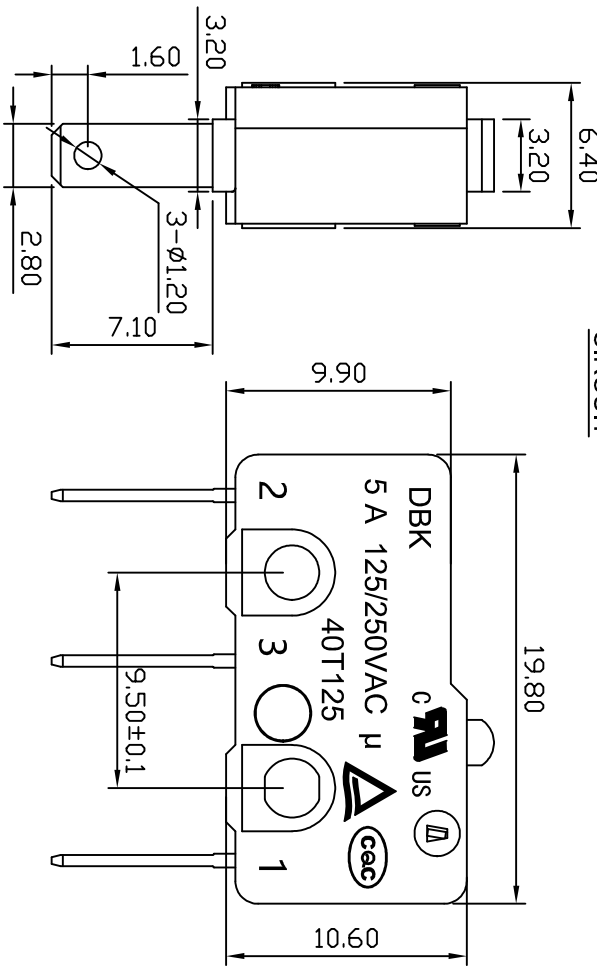

CIRCUIT

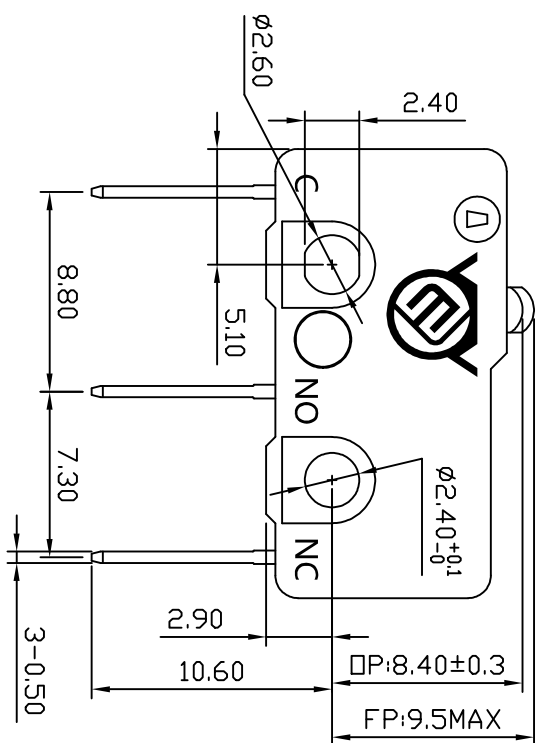

Rating	5 A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100m Ω	Electrical Life	50,000 cycles
Insulation Resistance	>100M Ω DC500V	Ambient Temper. Used	-40°C to +125°C
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40°C
Soldering Temper.	235±5°C 5s	Operating Force	200gf MAX

10	铆钉 (Rivet)	1	AL	
9	触点 (CONTACT)	3	Silver Alloy	
8	C弹片 (SPRING)	1	C17200	
7	弹片 (SPRING)	1	C5210	
6	NO端子 (NO TERMINAL)	1	C2680	
5	NC端子 (NC TERMINAL)	1	C2680	
4	COM端子 (COM TERMINAL)	1	C2680	
3	按钮 (BUTTON)	1	PBT	UL94V-0
2	下盖 (BASE)	1	PBT	UL94V-0
1	上盖 (COVER)	1	PBT	UL94V-0

序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes
10	铆钉 (Rivet)	1	AL	
9	触点 (CONTACT)	3	Silver Alloy	
8	C弹片 (SPRING)	1	C17200	
7	弹片 (SPRING)	1	C5210	
6	NO端子 (NO TERMINAL)	1	C2680	
5	NC端子 (NC TERMINAL)	1	C2680	
4	COM端子 (COM TERMINAL)	1	C2680	
3	按钮 (BUTTON)	1	PBT	UL94V-0
2	下盖 (BASE)	1	PBT	UL94V-0
1	上盖 (COVER)	1	PBT	UL94V-0



TOLERANCE				DESIGN	DATE	TITLE	DB系列微动开关	
UNLESS OTHERWISE STATED				WYJ	2024.12.12			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DBK-00K-150-2	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
			±2°	SCALE	3:1	PRINT DATE	2025.02.28	

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.