

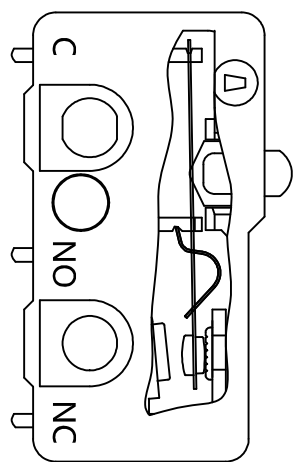
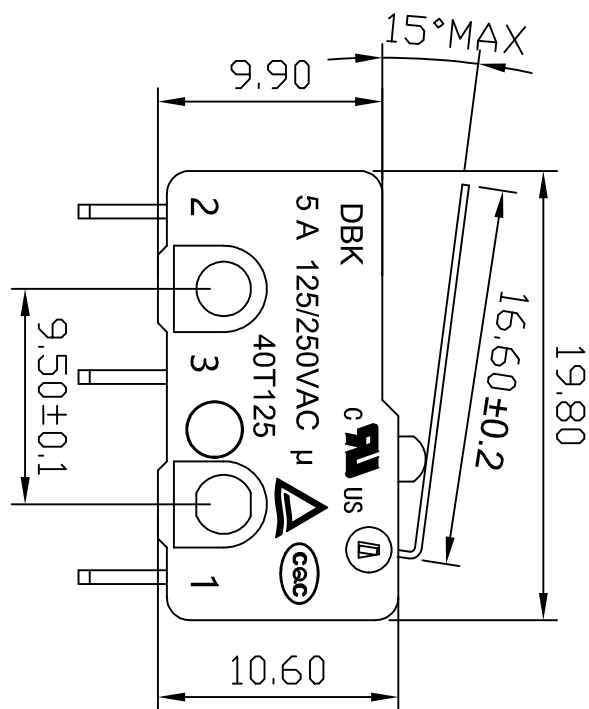


12345678910

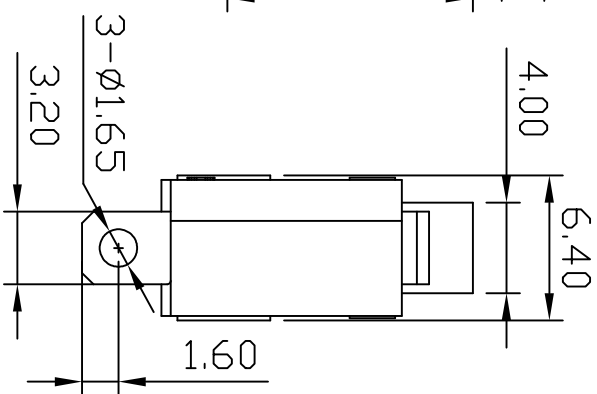

CIRCUIT

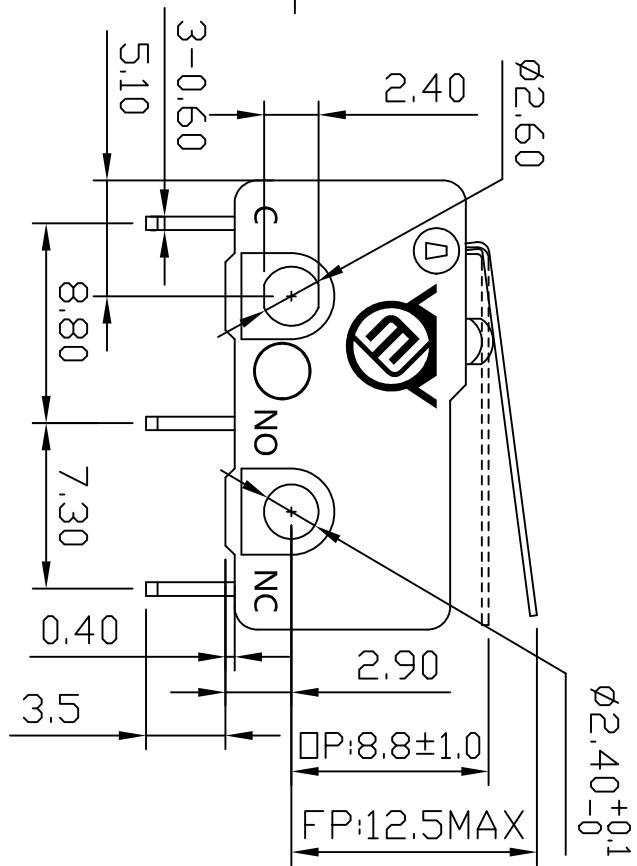

11	压柄(Lever)	1	SUS	
10	铆钉(Rivet)	1	AL	
9	触点(CONTACT)	3	Silver Alloy	
8	C弹片(SPRING)	1	C17200	
7	弹片(SPRING)	1	C5210	
6	NO端子(NO TERMINAL)	1	C2680	
5	NC端子(NC TERMINAL)	1	C2680	
4	COM端子(COM TERMINAL)	1	C2680	
3	按钮(BUTTON)	1	PBT	UL94V-0
2	下盖(BASE)	1	PBT	UL94V-0
1	上盖(COVER)	1	PBT	UL94V-0
序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes



Rating	5 A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100m Ω	Electrical Life	50,000 cycles
Insulation Resistance	>100M Ω DC500V	Ambient Temper. Used	-40°C to +125°C
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40°C
Soldering Temper.	235±5°C 5s	Operating Force	50gf MAX

RÖHS COMPLIANT Pb-free RoHS Compliant				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	DB系列微动开关
UNLESS OTHERWISE STATED				WYJ	2024.12.12		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DBK-01N-40-2
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	2:1			PRINT DATE	2025.02.28