

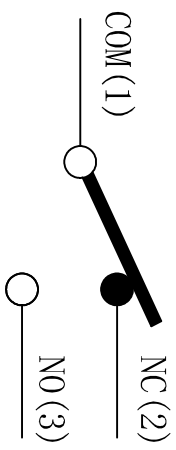
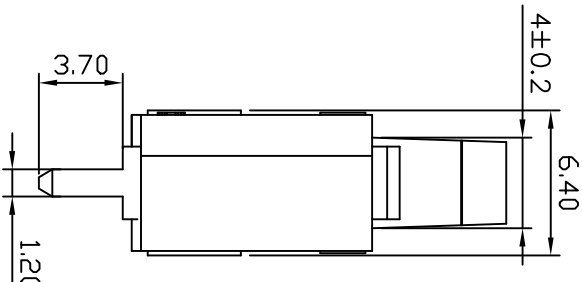
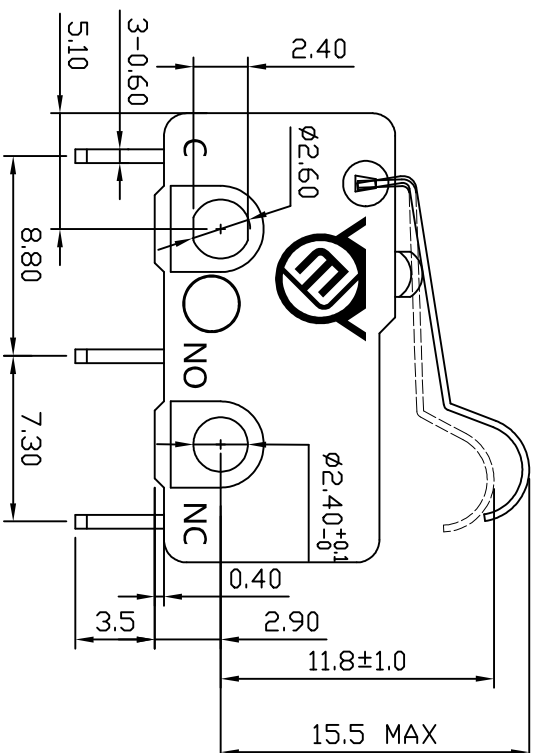


12345678910

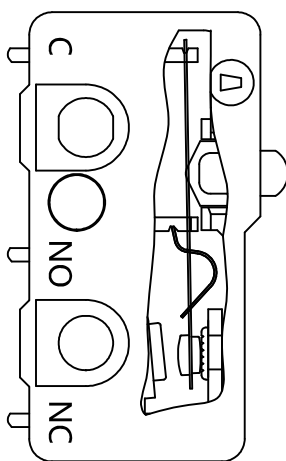

CIRCUIT

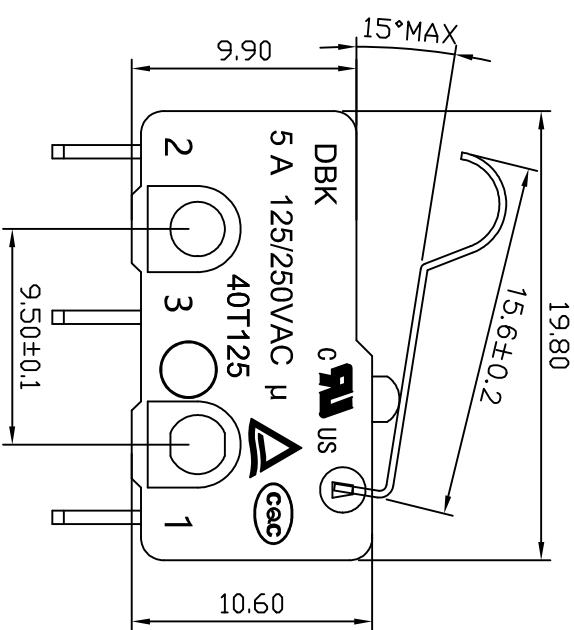

Rating	5A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100mΩ	Electrical Life	50,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-40℃ to +125℃
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	70gf MAX

11	压柄 (Lever)	1	SUS	
10	铆钉 (Rivet)	1	AL	
9	触点 (CONTACT)	3	Silver Alloy	
8	C弹片 (SPRING)	1	C17200	
7	弹片 (SPRING)	1	C5210	
6	NO端子 (NO TERMINAL)	1	C2680	
5	NC端子 (NC TERMINAL)	1	C2680	
4	COM端子 (COM TERMINAL)	1	C2680	
3	按钮 (BUTTON)	1	PBT	UL94V-0
2	下盖 (BASE)	1	PBT	UL94V-0
1	上盖 (COVER)	1	PBT	UL94V-0
序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes



ROHS COMPLIANT		Pb-free		Halogen free	
TOLERANCE		DESIGN		DATE	
UNLESS OTHERWISE STATED		WYJ		2024.12.12	
X.X	±0.20	SIZE	A4	CHKD	DATE
X.XX	±0.15	REV	A		MODEL
X.XXX	±0.10	UNIT	mm	APPD	DATE
±2°	SCALE	3:1			SHEET
					PRINT DATE
					1/3
					2025.02.28

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

DB系列微动开关

DBK-05P-40-2

