



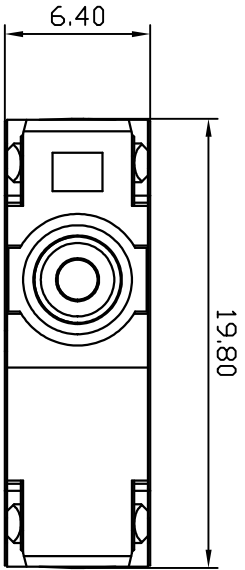
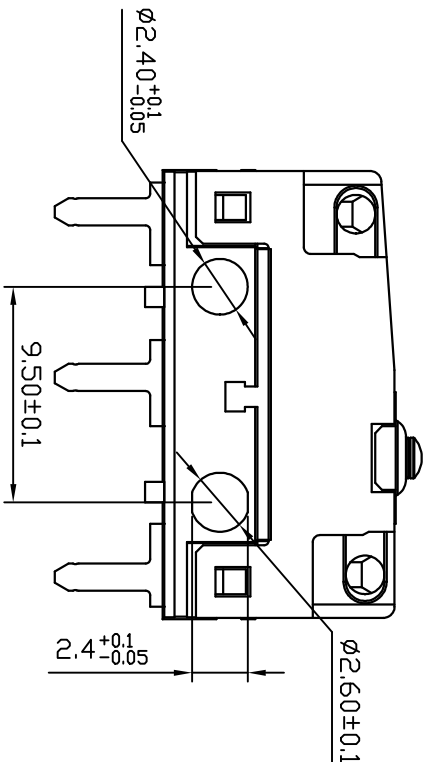


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

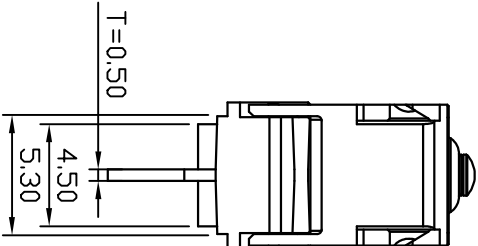

CIRCUIT

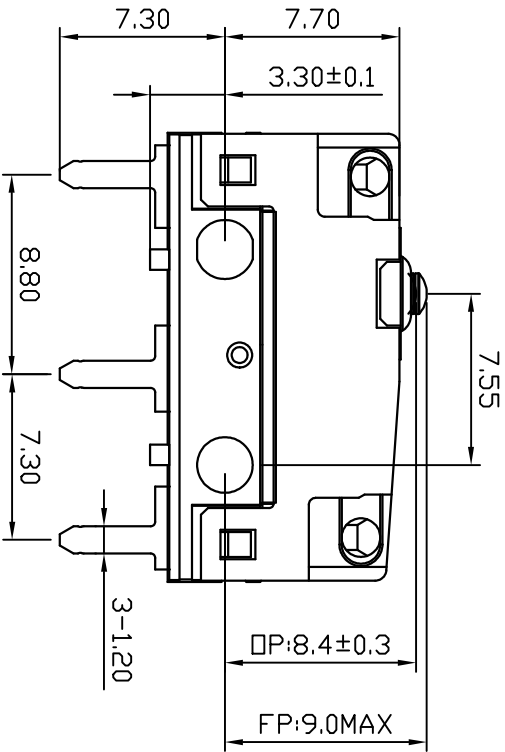

Rating	5A 125VAC	Electrical Life	10,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temp.	235±5℃ 5s	Operating Force	200gf max

说明 利用橡胶封装的密封结构实现防尘防水 (IEC IP67) 端子部分除外。

UL E508056
TUV R50140595
CQC19002225484
安全认证证书

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.



DF系列密封型 中微动开关

序号	零件名称	数量	材质	备注
----	------	----	----	----

6	端子	3	C2680	镀银
5	触点	3	银合金	
4	按钮	1	PBT UL94 V0	
3	弹片	1	CI17200	进口
2	盖片	1	尼龙	镀铜
1	底座	1	PBT UL94 V0	

2024.12.12

ISSUED



TOLERANCE

DESIGN

DATE

TITLE

DF系列密封型 中微动开关

UNLESS OTHERWISE STATED

CHKD

DATE

MODEL

DFK-00P

X.X

SIZE

REV

A

APPD

DATE

X.XXX

±0.10

UNIT

mm

SCALE

3:1

±2°

SCALE

3:1

PRINT DATE

2025.02.28

