
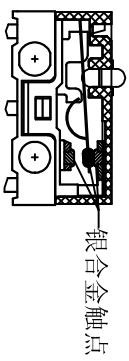

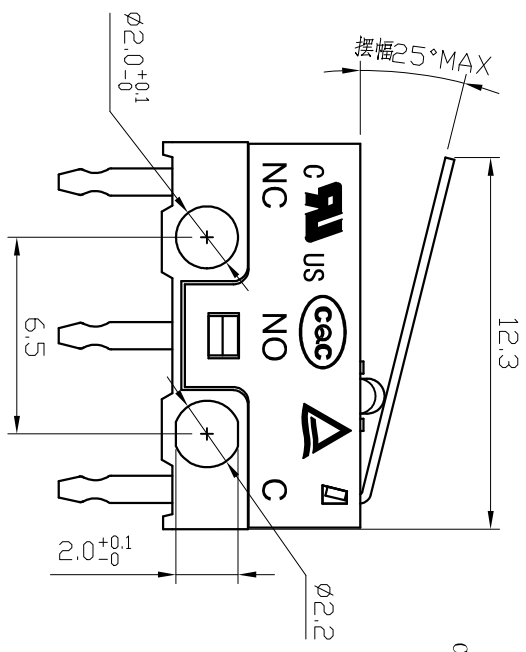
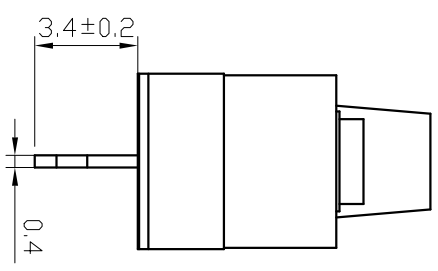
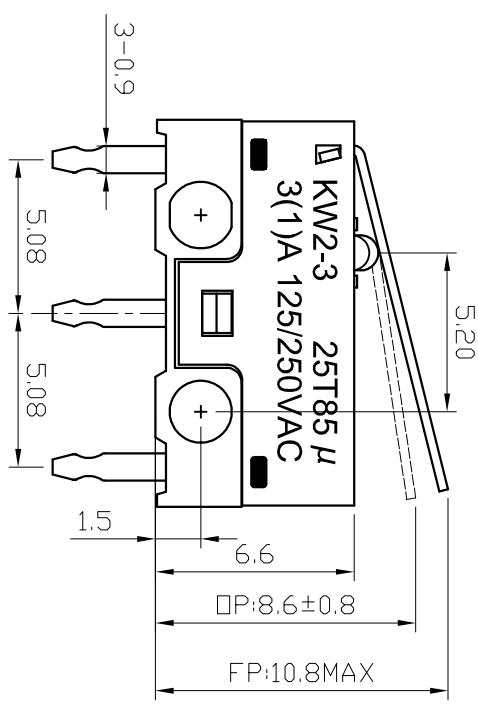
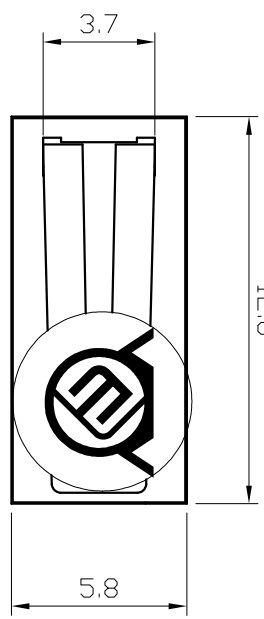


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

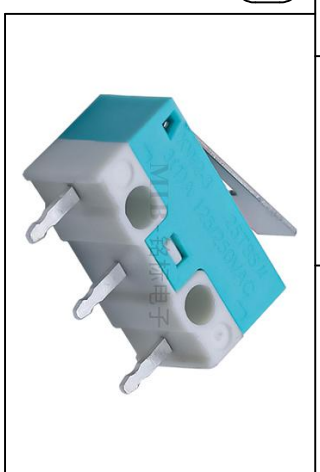

Rating	3(1)A 125/250VAC	Electrical Life	10,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	1,000,000 cycles
Insulation Resistance	>50MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	60gf Max

7	压柄	1	SUS	
6	端子	3	C2680	镀银
5	触点	3	银合金	
4	按钮	1	PBT 阻燃料	
3	弹片	1	CI7200	进口铍铜
2	盖片	1	PBT 阻燃料	
1	底座	1	PBT 阻燃料	
序号	零件名称	数量	材质	备注

UL E508056
TUV R50440595
CQC19002225484



TOLERANCE				DESIGN			
UNLESS OTHERWISE STATED				DATE			
X.X	±0.20	SIZE	A4	DATE			
X.XX	±0.15	REV	A	DATE			
X.XXX	±0.10	UNIT	mm	DATE			
±	±2°	SCALE	4:1	DATE			

TITLE				MODEL			
DG系列 微动开关				DG-12P-30-5			
SHEET				1/3			
PRINT DATE				2025.02.28			

ROHS COMPLIANT

Pb

Pb-free

HS

RoHS Free

东莞市铭标电子科技有限公司

Ming Biao Electronic Technology Co., Ltd.