

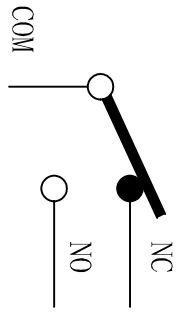
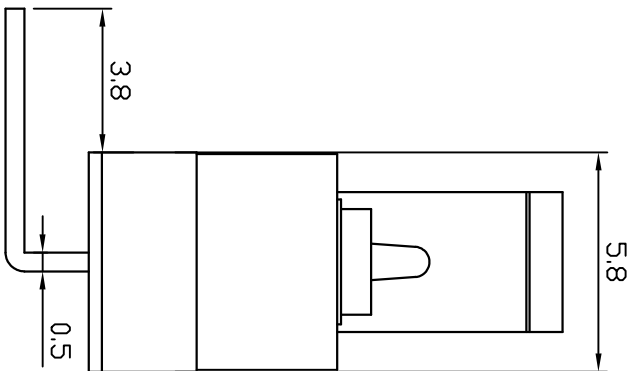
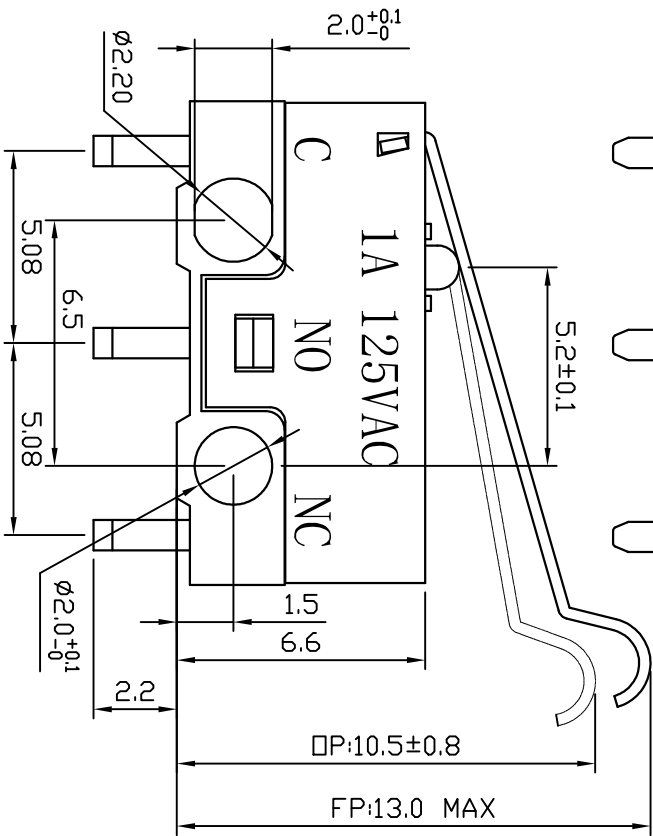


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

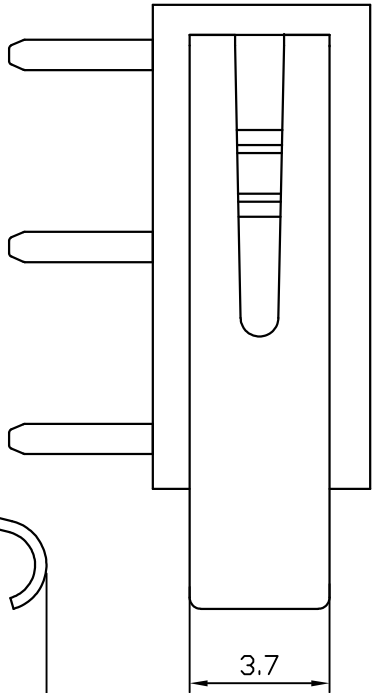

CIRCUIT



左弯脚

Rating	DC30V 100mA	Electrical Life	100,000 cycles
Contact Resistance	500m Ω Max	Mechanical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	50gf max



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

7	压柄	SUS	
6	触点	银合金	
5	端子	C2680	镀银
4	弹片	C5210	
3	按钮	PBT	白色
2	上盖	PBT	黑色
1	底座	PBT	白色
序号	名称	材料	备注



ROHS COMPLIANT Pb-free HF hazardous free				 东莞市铭标电子科技有限公司 Wing Biao Electronic Technology Co., Ltd.					
TOLERANCE				DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED				WYJ		2024.12.20		微动开关	
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL	
X.XX	±0.15	REV	A	APPD		DATE		DM1-04CL-30-3	
X.XXX	±0.10	UNIT	mm			SHEET			
SCALE		5:1	PRINT DATE						
						1/3			

