

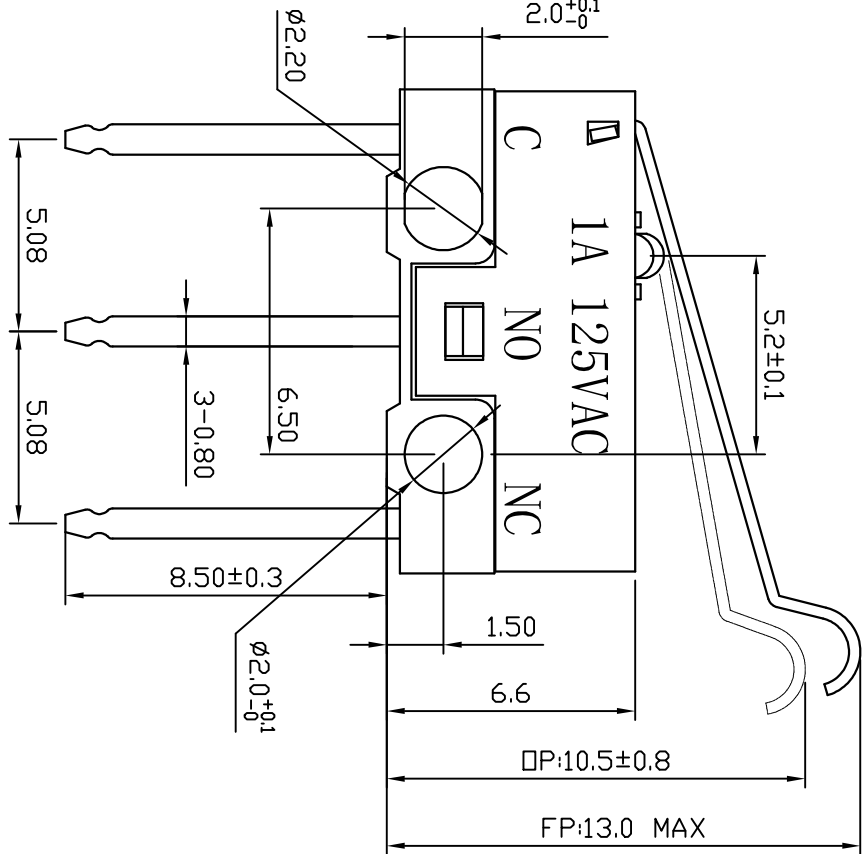


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao



Rating	DC30V 100mA	Electrical Life	100,000 cycles
Contact Resistance	500mΩ Max	Mechanical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	50gf Max

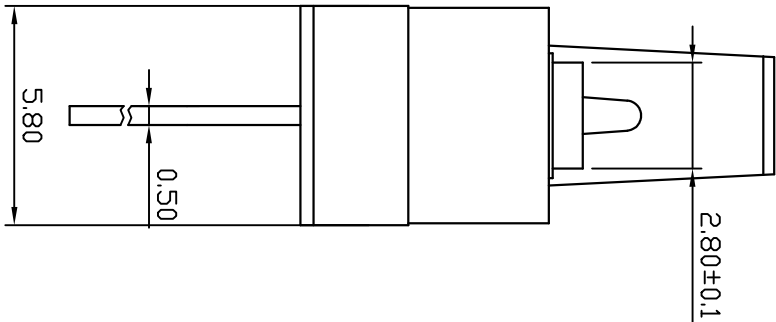

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.



7	压柄	SUS	
6	触点	银合金	
5	端子	C2680	镀银
4	弹片	C5210	
3	按钮	PBT	
2	上盖	PBT	
1	底座	PBT	
序号	名称	材料	备注

TOLERANCE				DESIGN			
UNLESS OTHERWISE STATED				DATE			
X.X	±0.20	SIZE	A4	DATE	2024.12.12	TITLE	微动开关
X.XX	±0.15	REV	A	DATE		MODEL	DM1-04PL-30-3
X.XXX	±0.10	UNIT	mm	DATE		SHEET	1/3
△	±2°	SCALE	5:1	DATE		PRINT DATE	2025.02.28