
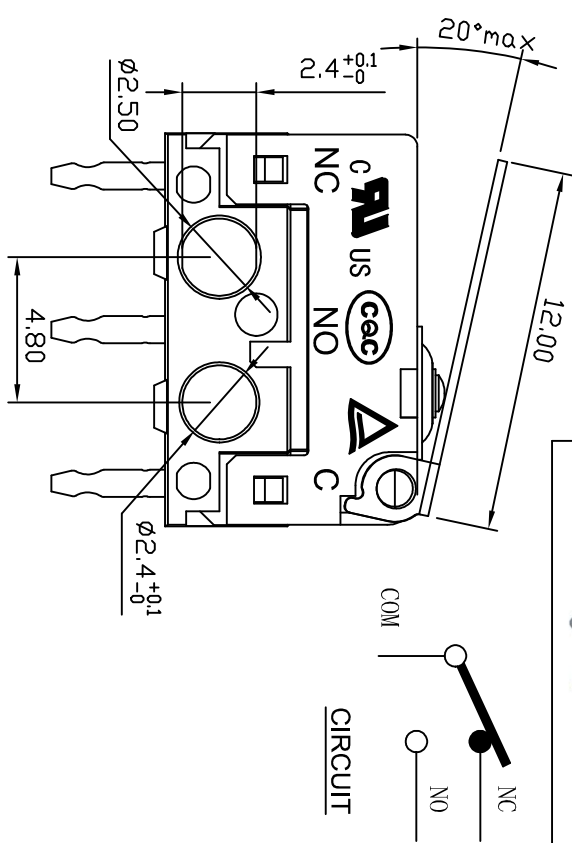
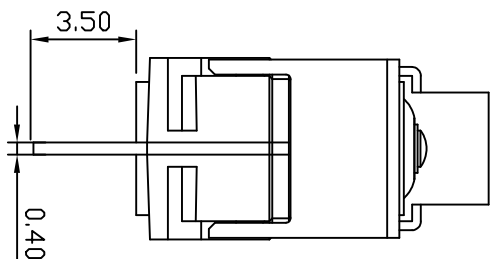
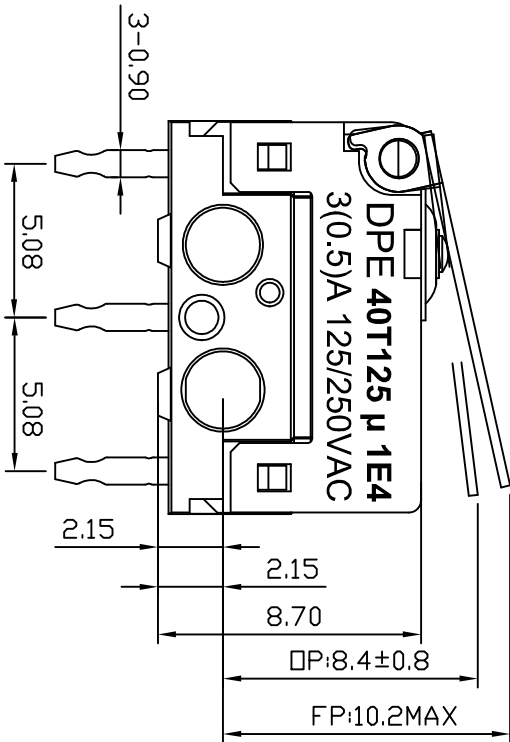
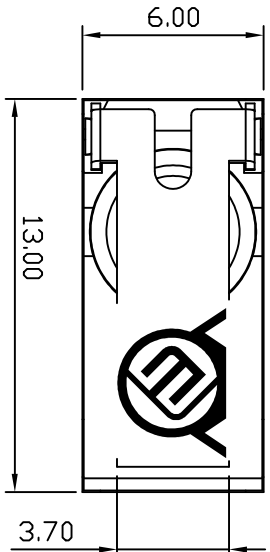


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

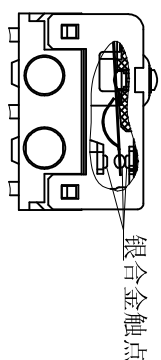

Rating	3A DC48V 3A 125VAC	Electrical Life	30,000 cycles 10,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	50gf max

说明 利用橡胶封装的密封结构实现防尘防水 (IEC IP67) 端子部分除外。

9	压柄	1	SUS	
8	密封垫	1	TPE	
7	密封帽	1	硅胶	
6	端子	3	C2680	镀银
5	触点	3	合金金	
4	按钮	1	PBT UL94 V0	
3	弹片	1	C17200	进口镀铜
2	盖片	1	PA66 UL94 V0	
1	底座	1	PBT UL94 V0	
序号	零件名称	数量	材质	备注



RoHS COMPLIANT Pb-free		DESIGN DATE 2024.12.12		TITLE DP系列 密封型 超小型 微动开关	
UNLESS OTHERWISE STATED		CHKD DATE		MODEL DPE-D-02P	
X.X	±0.20	SIZE	A4	DATE	
X.XX	±0.15	REV	A	MODEL	
X.XXX	±0.10	UNIT	mm	DATE	
△	±2°	SCALE	4:1	APPD	
SHEET 1/3		PRINT DATE 2025.02.28		SHEET 1/3	

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.