

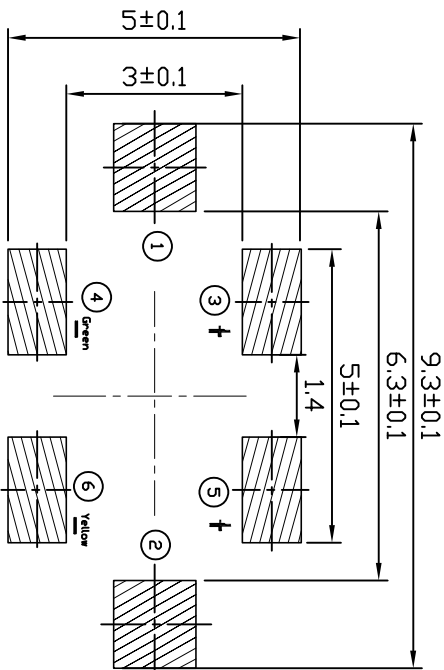
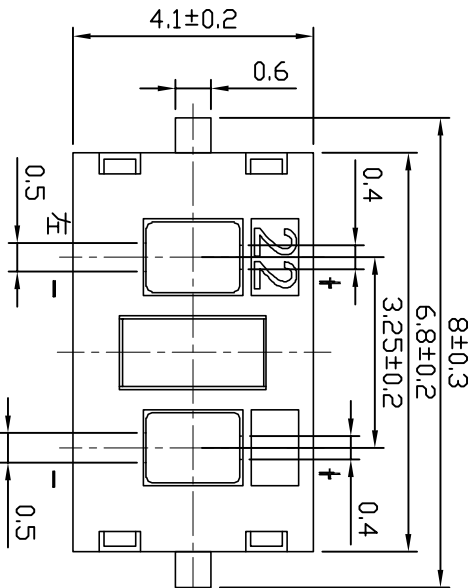



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

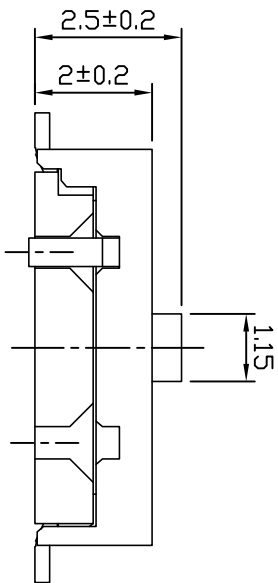

CIRCUIT

SPECIFICATIONS:

Operating temperature range: -25°C to +75°C
Rating: 30V DC, 30mA
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V.AC. 1Min
Contact resistance: 50mΩ Max
Life: 3,000 Cycles
Travel: 0.25±0.1mm
Operating force: 160±50gf

PCB LAYOUT

单色灯光	灯光代码	电路原理图
左白/右蓝	W/BL White/Blue	
左红/右绿	R/G Red/Green	
左白/右红	W/R White/Red	
左绿/右蓝	G/BL Green/Blue	
左蓝/右蓝	BL/BL Blue/Blue	
左绿/右黄	G/Y Green/Yellow	
...	...	..



 RoHS COMPLIANT Pb-free				 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	
UNLESS OTHERWISE STATED				WYJ	2024.06.19	Illuminated Switch	
XX	±0.20	SIZE	A4	CHKD	DATE	MODEL	
XXX	±0.15	REV	A			LSF407-025JGY-R	
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	
	±2°	SCALE	8:1			PRINT DATE	
						2025.02.11	

