
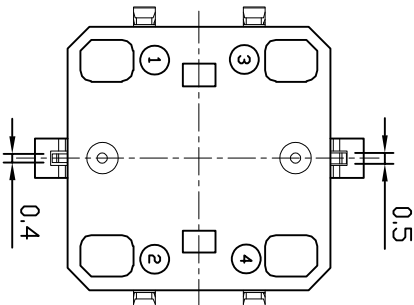
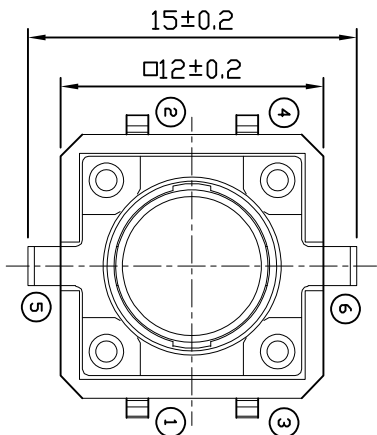

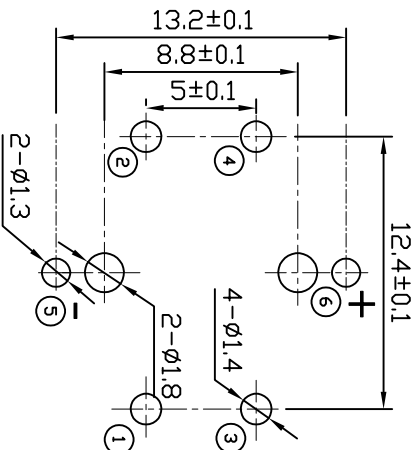
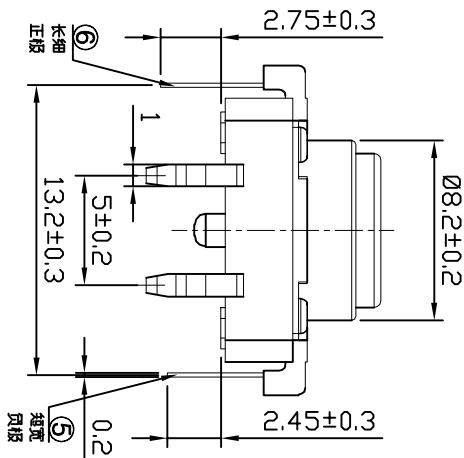


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

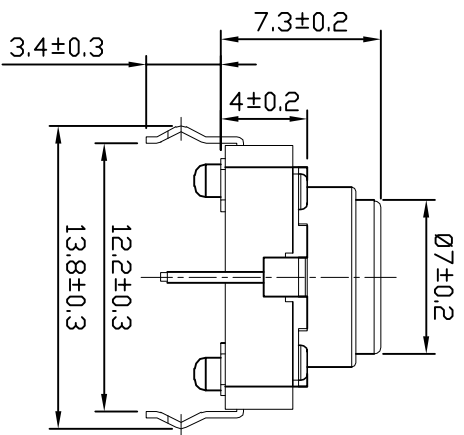

SPECIFICATIONS:

Operating temperature range: -25℃to+75℃
Rating: 30V DC, 30mA
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V AC, 1min
Contact resistance: 50mΩ Max
Life: 100,000 Cycles
Travel: 0.25±0.1mm
Operating force: 160±50gf

灯光	灯光代码
白光	W/white
红光	R Red
绿光	G Green
黄光	Y Yellow
蓝光	BL Blue
..	



R&D COMPLAINT Pb-free RoHS				Ming Biao 铭标			
TOLERANCE				DESIGN			
UNLESS OTHERWISE STATED				DATE			
XX	±0.20	SIZE	A4	CHKD	DATE	TITLE	Illuminated Switch
XXX	±0.15	REV	A		2024.06.20	MODEL	LSP1230-073J-R
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
±2°	SCALE	3:1			PRINT DATE	2025.02.11	