
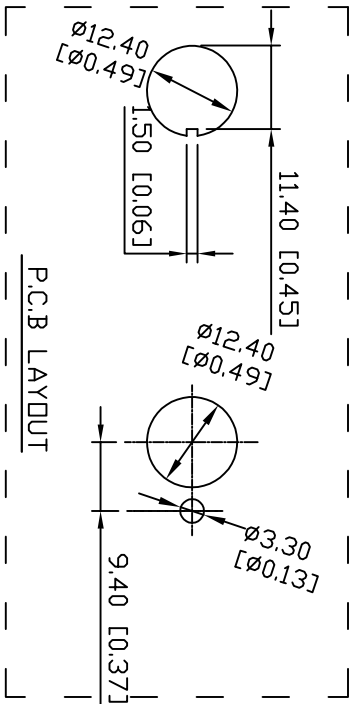


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

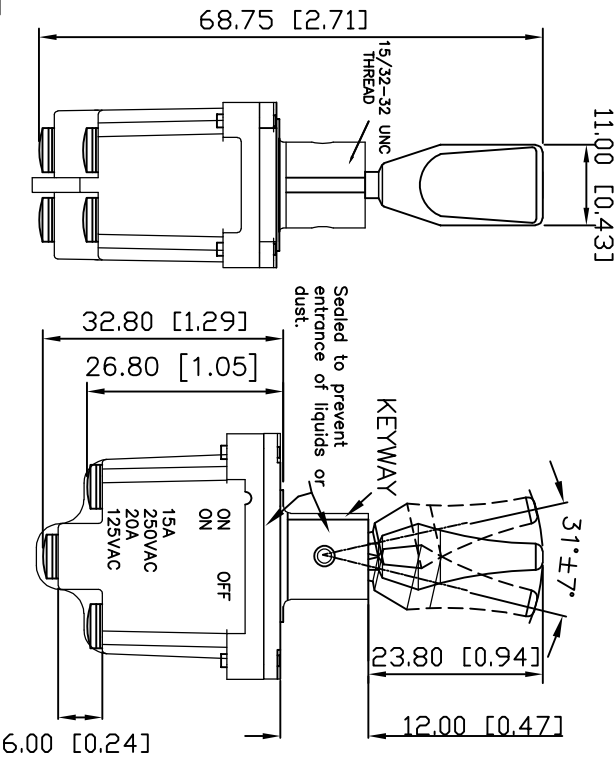


SPECIFICATIONS:

- 1.CONTACT RESISTANCE: 20mΩ.(Max)
- 2.INSULATION RESISTANCE: 100VDC-100MΩ.(Min)
- 3.DIELECTRIC STRENGTH: 1500VAC-1MINUTE.
- 4.MECHANICAL LIFE CYCLE: 100,000 CYCLES.
- 5.OPERATING TEMPERATURE: -40 TO +85°C.
- 6.FRONT SEAL: IP 68.

RATING:

1.RESISTIVE LOAD: 10A 125/250VAC, 15A 28VDC. 2.INDUCTIVE LOAD: 15A 28VDC.

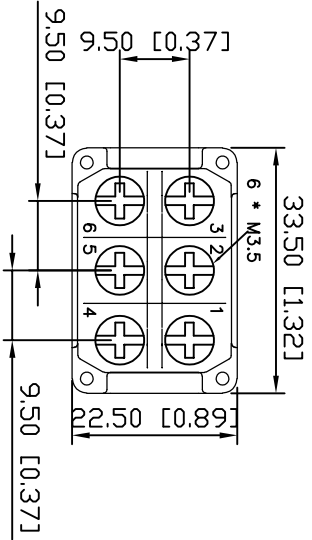

NO.	PART NAME	MATERIAL	QTY	FINISHING
1	ACTUATOR	COPPER ALLOY	1	Cr PLATED
2	HOUSING	NYLON (UL94V-0)	1	
3	BUSHING	ZINC ALLOY	1	
4	TERMINAL	COPPER ALLOY	3	Ag PLATED
5	CONTACT	COPPER ALLOY	1	Ag PLATED
6	O-RING	SILICONE RUBBER	1	
7	SHELL	STAINLESS STEEL	1	Ni PLATED

Switching Position			Schematic	
Model				
DG1	ON	NONE		ON
DG2	OFF	NONE		(ON)
DG3	ON	OFF		ON
DG4	(ON)	OFF		(ON)
DG5	(ON)	OFF		ON
DG6	ON	ON		ON
DG7	(ON)	ON		(ON)
DG8	(ON)	ON		ON
DG9	OFF	NONE	ON	
Term.	2-1	OPEN	2-3	
Comm.				



RÖHS COMPLIANT		Pb Pb-free		HF RoHS Compliant	
TOLERANCE		DESIGN		DATE	
UNLESS OTHERWISE STATED		7/4		2024.09.15	
TITLE		CHKD		DATE	
X.X		±0.20		SIZE	
X.XX		±0.15		REV	
X.XXX		±0.10		UNIT	
SCALE		1:1		DATE	
APPD		DATE		SHEET	
PRINT DATE		2025.02.11		1/2	

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

Toggle Switches

HT-DG3B4T1T11

