
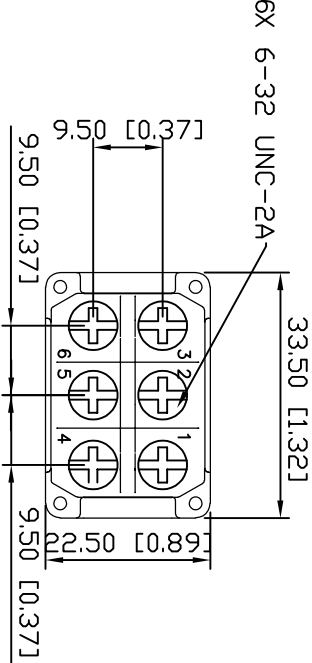
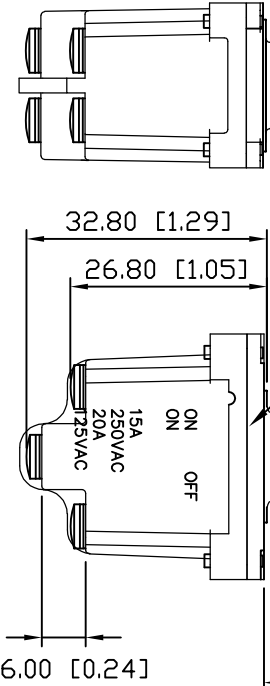
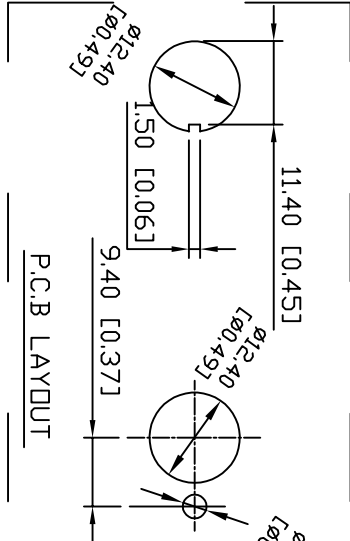


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

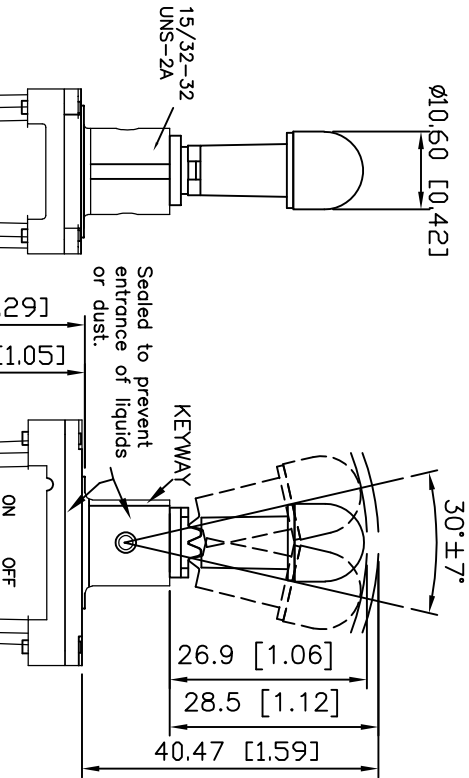

- SPECIFICATIONS:
- 1. CONTACT RESISTANCE: 20mΩ.(Max)
 - 2. INSULATION RESISTANCE: 100VDC-100MΩ.(Min)
 - 3. DIELECTRIC STRENGTH: 1500VAC-1MINUTE.
 - 4. MECHANICAL LIFE CYCLE: 100,000 CYCLES.
 - 5. OPERATING TEMPERATURE: -40 TO +85°C.
 - 6. FRONT SEAL: IP 68.

RATING:

- 1. RESISTIVE LOAD: 10A 125/250VAC, 15A 28VDC.
- 2. INDUCTIVE LOAD: 15A 28VDC.

Model	Switching Position			Schematic
	1 com.	2 com.	3 com.	
DG1	ON	NONE	ON	
DG2	OFF	NONE	(ON)	
DG3	ON	OFF	ON	
DG4	(ON)	OFF	(ON)	
DG5	(ON)	OFF	ON	
DG6	ON	ON	ON	
DG7	(ON)	ON	(ON)	
DG8	(ON)	ON	ON	
DG9	OFF	NONE	ON	
DG10	(OFF)	NONE	ON	
DGB	(ON)	NONE	ON	
DGC	ON	NONE	(ON)	
Term. Comm.	2-1	OPEN	2-3	

NO	PART NAME	MATERIAL	QTY	FINISHING
1	ACTUATOR-CAP	COPPER ALLOY	1	Cr PLATED
2	ACTUATOR-OUTSIDE	STAINLESS STEEL	1	
3	ACTUATOR-INSIDE	COPPER ALLOY	1	Cr PLATED
4	BUSHING-TOP	STAINLESS STEEL	1	
5	HOUSING	NYLON (UL94V-0)	1	
6	BUSHING	ZINC ALLOY	1	
7	TERMINAL	COPPER ALLOY	6	Ag PLATED
8	CONTACT	COPPER ALLOY	2	Ag PLATED
9	O-RING	SILICONE RUBBER	1	
10	SHEEL	STAINLESS STEEL	1	NI PLATED



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

TOLERANCE		DESIGN		TITLE	
UNLESS OTHERWISE STATED		DATE	2024.09.15	DATE	Toggle Switches
XX	±0.20	SIZE	A4	CHKD	
XXX	±0.15	REV	A		
XXX	±0.10	UNIT	mm	APPD	
	±2°	SCALE	1:1	DATE	
				SHEET	1/2
				PRINT DATE	2025.02.11