

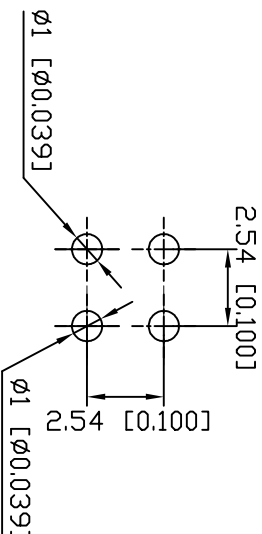




本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

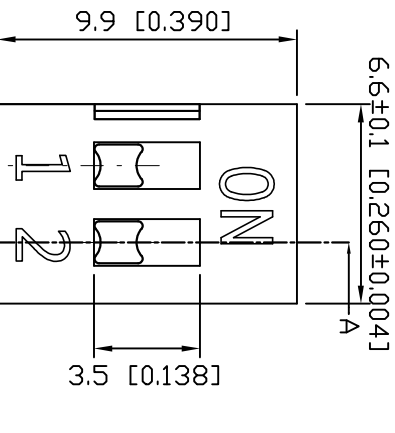

P.C.B LAYOUT



CIRCUIT

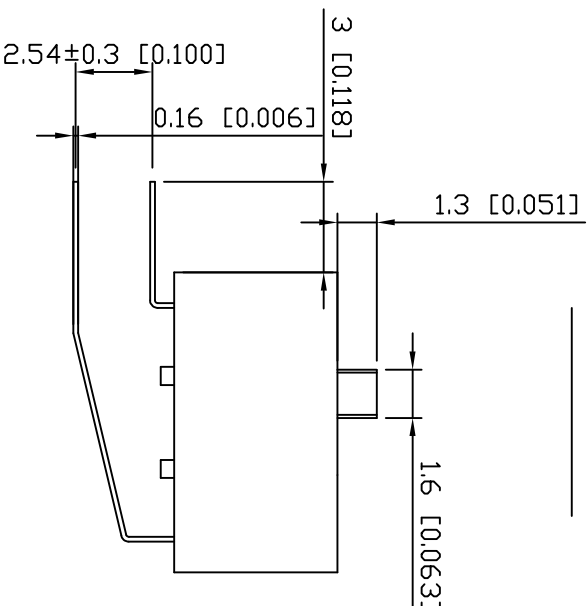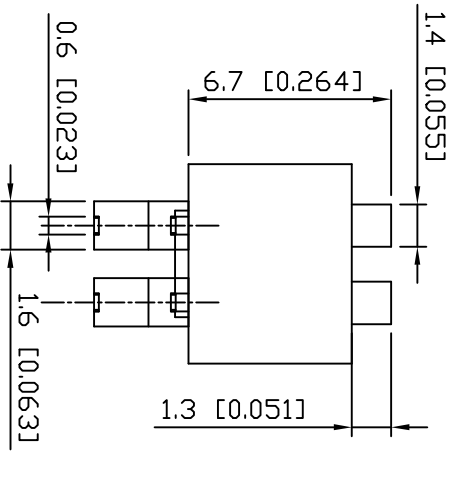

SPECIFICATIONS:

Operating temperature range: -20°C to $+70^{\circ}\text{C}$
Rating: 25mA, 24V DC Max
Insulation resistance: $100\text{M}\Omega$ min. 500V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: $50\text{m}\Omega$ Max
Life: 3000 Cycles
Travel: 2.00mm
Operating force: 200gf



ROHS COMPLIANT Pb-Free Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	
UNLESS OTHERWISE STATED				WYJ	2024.09.27	弯角式DIP开关	
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DVJ01-DA-02
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	2:1		PRINT DATE		2025.07.08