



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

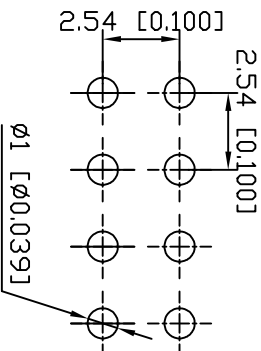




P.C.B LAYOUT



CIRCUIT

SPECIFICATIONS:

Operating temperature range: -20°C to $+70^{\circ}\text{C}$
Rating: 25mA, 24V DC Max
Insulation resistance: 100M Ω min. 500V DC
Dielectric strength: 500V AC for 1min
Contact resistance: 50m Ω Max
Life: 3000 Cycles
Travel: 2.00mm
Operating force: 200gf

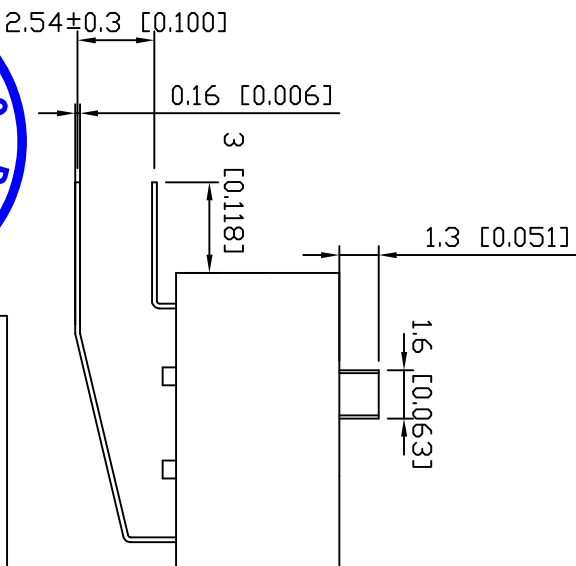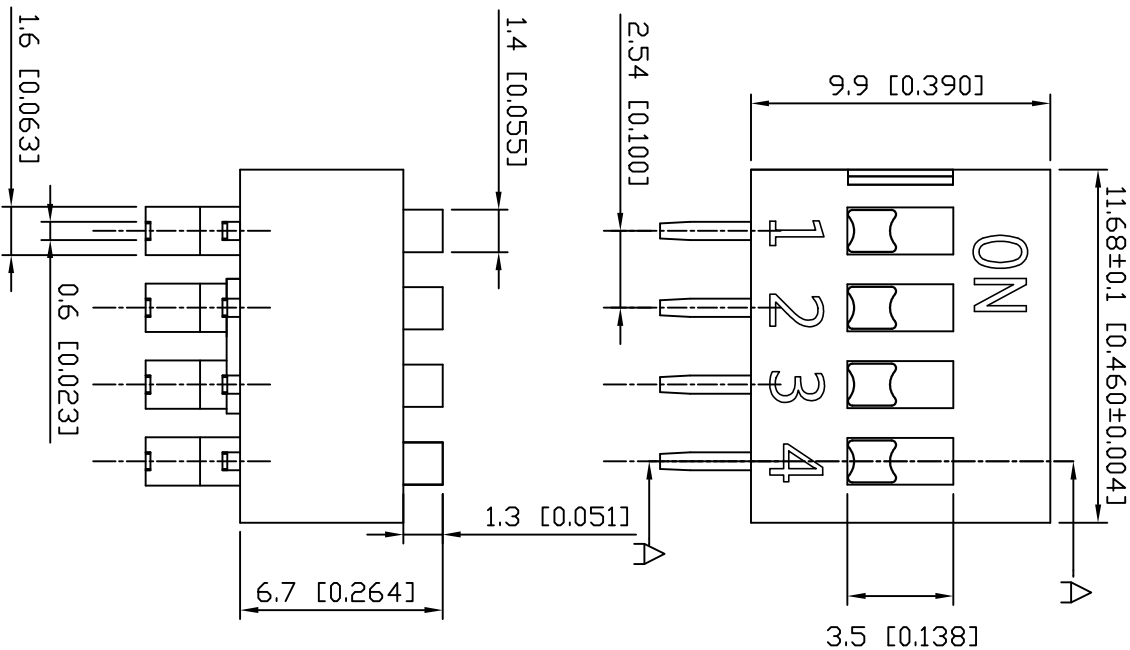

RoHS COMPLIANT RoHS Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.						
TOLERANCE			DESIGN		DATE		TITLE		弯角式DIP开关	
UNLESS OTHERWISE STATED			WJY		2024. 09. 28		MODEL			
X.X	±0.20	SIZE	A4		DATE		DVJ01-DA-04			
X.XX	±0.15	REV	A		APPD		SHEET			
X.XXX	±0.10	UNIT	mm		DATE		PRINT DATE		1/3	
SCALE 2:1							2025.07.08			