

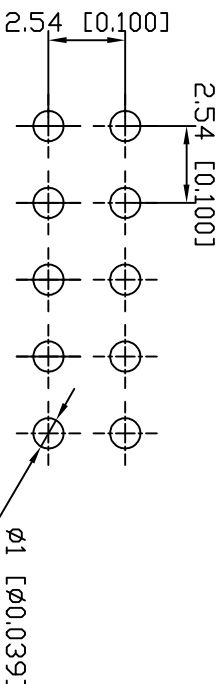


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

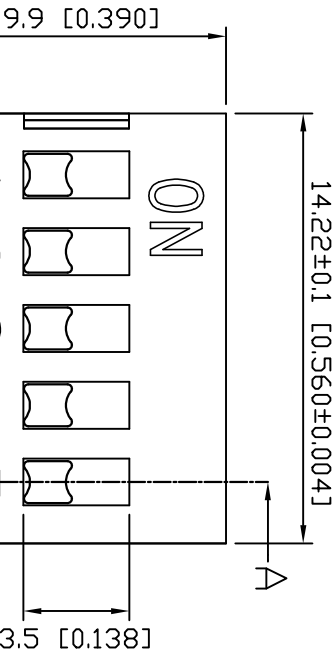



P.C.B LAYOUT

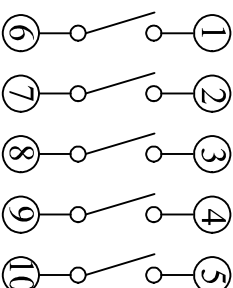

CIRCUIT

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 25mA, 24V DC Max
Insulation resistance: 100MΩ min. 500V DC
Dielectric strength: 500V AC for 1min
Contact resistance: 50mΩ Max
Life: 3000 Cycles
Travel: 2.00mm
Operating force: 200gf

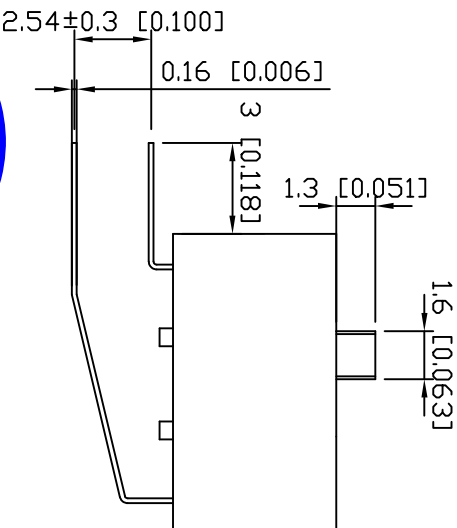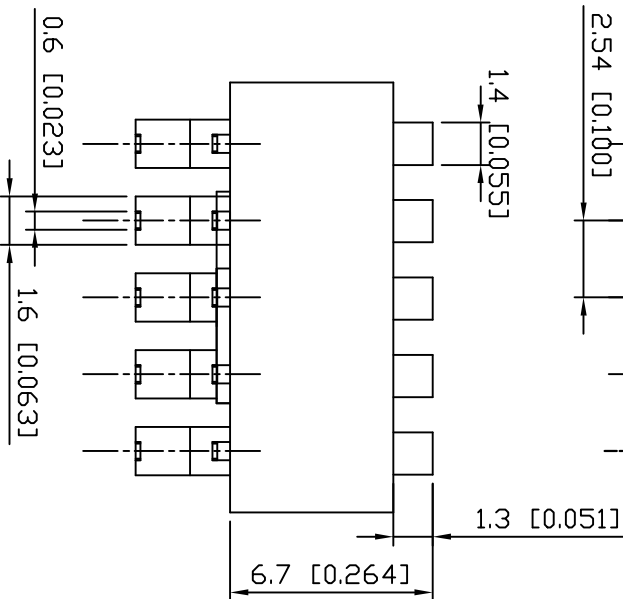

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

RoHS COMPLIANT Pb-Free Halogen Free				DESIGN DATE 2024.09.28			
TOLERANCE UNLESS OTHERWISE STATED				TITLE 弯角式DIP开关			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DVJ01-DA-05
X.XX	±0.15	REV	A	APPD	DATE	SHEET	1/3
X.XXX	±0.10	UNIT	mm	SCALE	2:1	PRINT DATE	2025.07.08