





本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

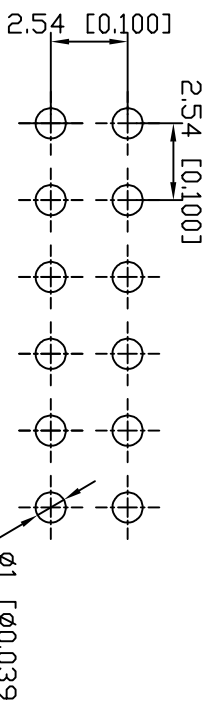

P.C.B LAYOUT

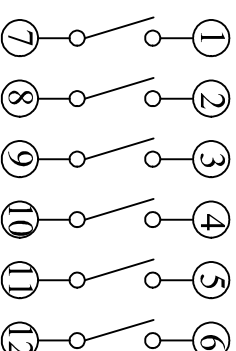

CIRCUIT

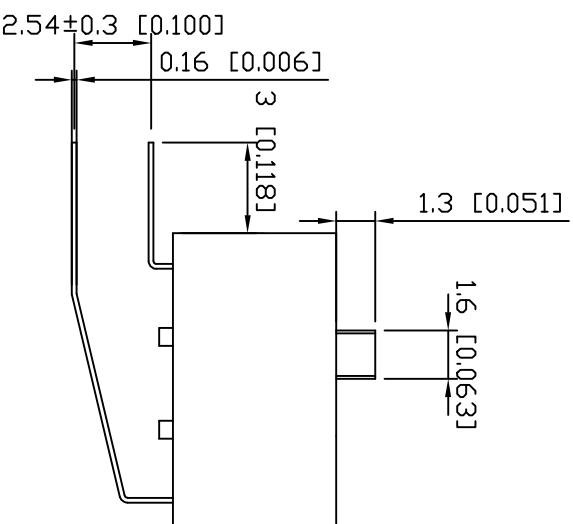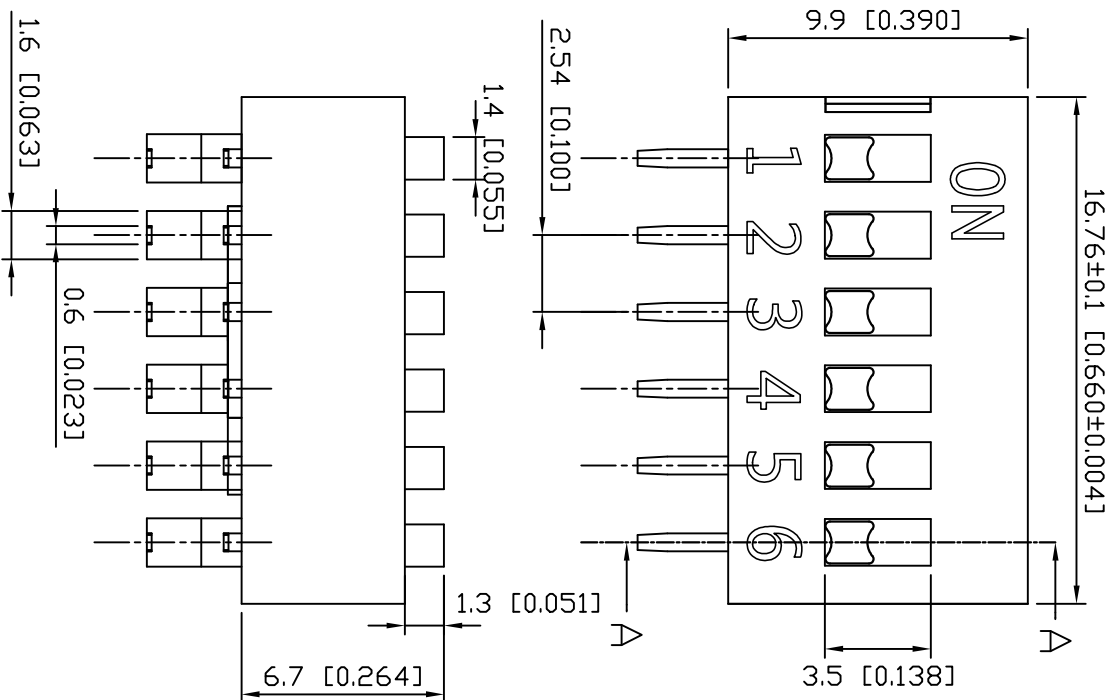

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 25mA, 24V DC Max
Insulation resistance: 100MΩ min. 500V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: 50mΩ Max
Life: 3000 Cycles
Travel: 2.00mm
Operating force: 200gf



R&D COMPLIANT				DESIGN		DATE		TITLE	
TOLERANCE				UNLESS OTHERWISE STATED		DATE		DATE	
X.X				±0.20	SIZE	A4		DATE	
X.XX				±0.15	REV	A		DATE	
X.XXX				±0.10	UNIT	mm		DATE	
A				±2°	SCALE	2:1		DATE	
R&D COMPLIANT				DESIGN		DATE		TITLE	
X.X				±0.20	SIZE	A4		DATE	
X.XX				±0.15	REV	A		DATE	
X.XXX				±0.10	UNIT	mm		DATE	
A				±2°	SCALE	2:1		DATE	