

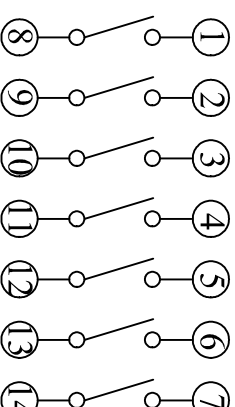


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.


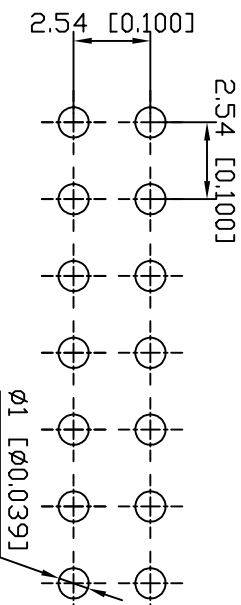


P.C.B LAYOUT

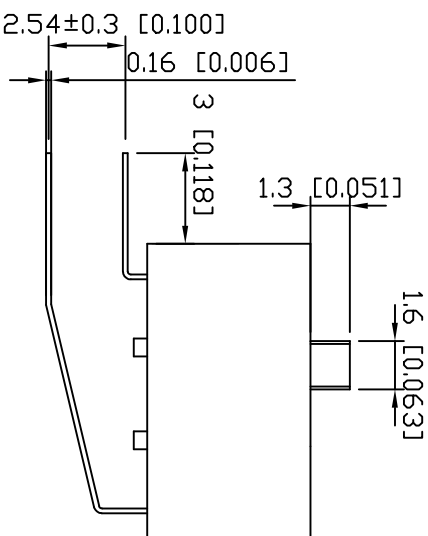

SPECIFICATIONS:

Operating temperature range: -20°C to $+70^{\circ}\text{C}$
Rating: 25mA, 24V DC Max
Insulation resistance: 100M Ω min. 500V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: 50m Ω Max
Life: 3000 Cycles
Travel: 2.00mm
Operating force: 200gf

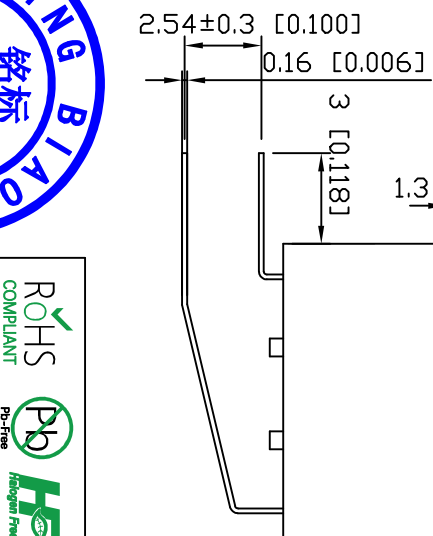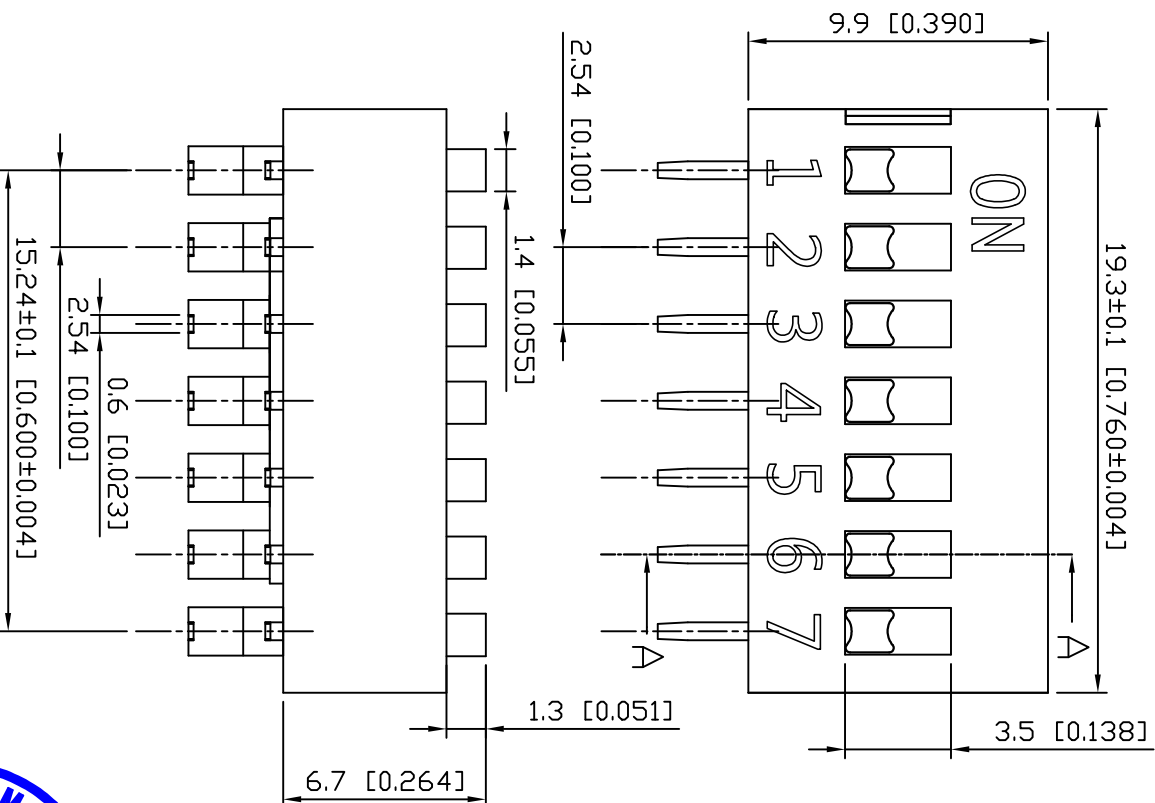

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

TOLERANCE				DESIGN	DATE	TITLE
UNLESS OTHERWISE STATED				WYJ	2024.09.28	弯角式DIP开关
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL
X.XX	±0.15	REV	A			DVJ01-DA-07
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET
	±2°	SCALE	2:1			1/3
					PRINT DATE	2025.07.08