

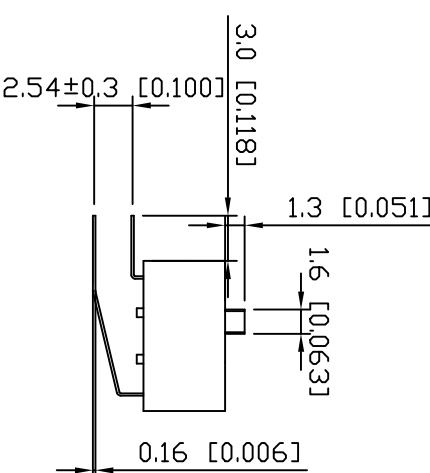
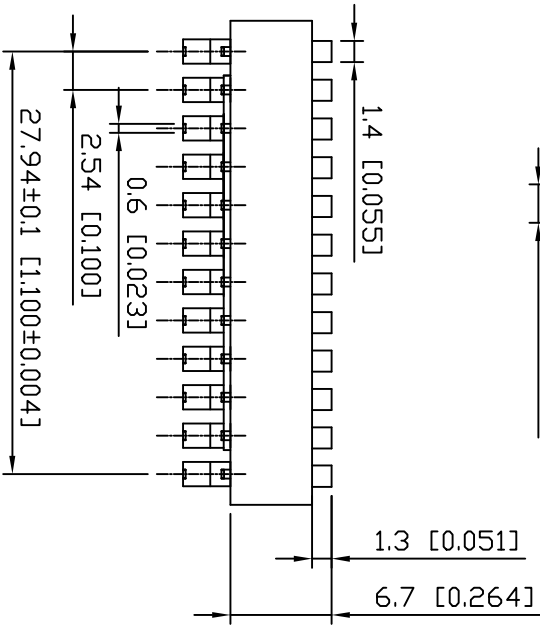
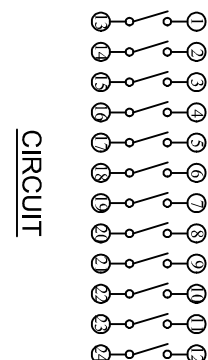


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

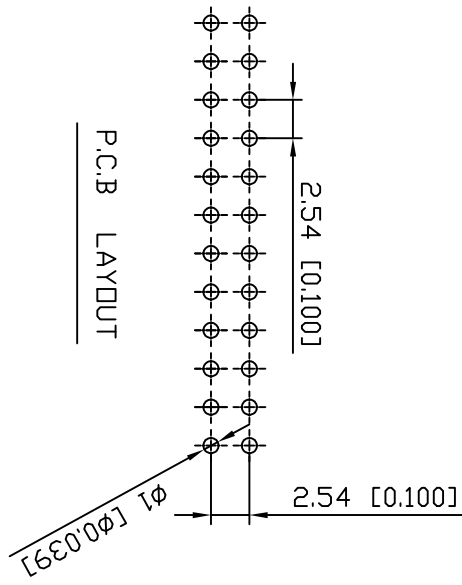

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 25mA, 24V DC Max
Insulation resistance: 100MΩ min, 500V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: 50mΩ Max
Life: 3000 Cycles
Travel: 2.00mm
Operating force: 200gf

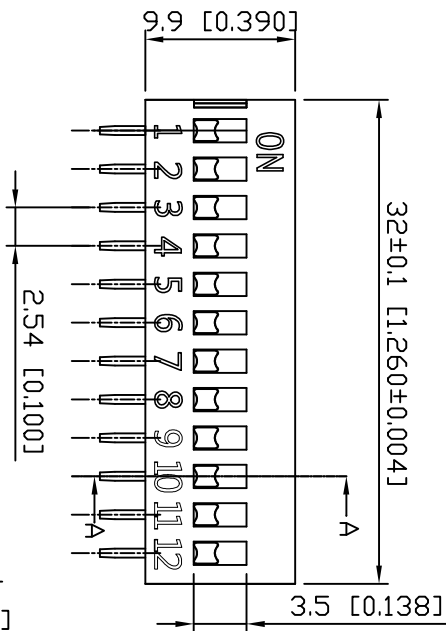

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

2024.09.28

ISSUED

R&D DEPT.

TOLERANCE				DESIGN	DATE	TITLE
UNLESS OTHERWISE STATED				WYJ	2024.09.28	弯角式DIP开关
X.X	±0.20	SIZE	A4	CHKD	DATE	
X.XX	±0.15	REV	A		MODEL	DVJ01-DA-12
X.XXX	±0.10	UNIT	mm	APPD	DATE	
±	±2°	SCALE	1:1		SHEET	1/3
					PRINT DATE	2025.07.08