

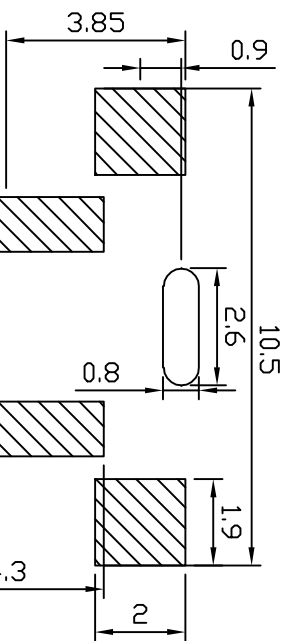
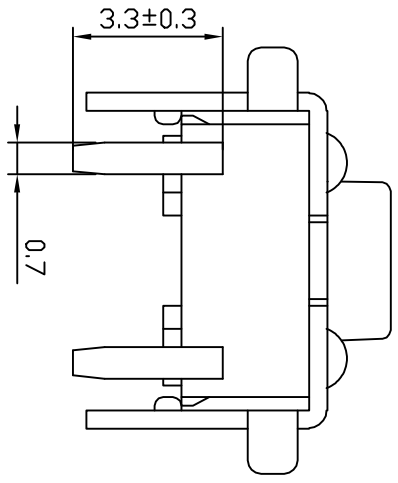
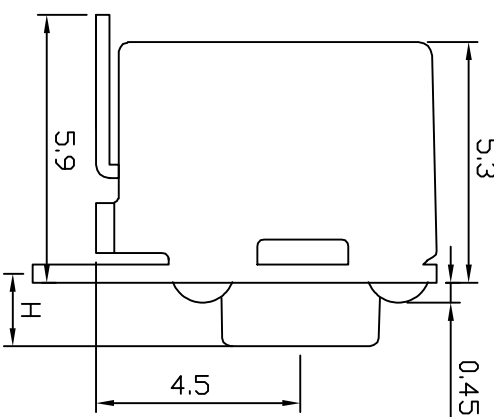


本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

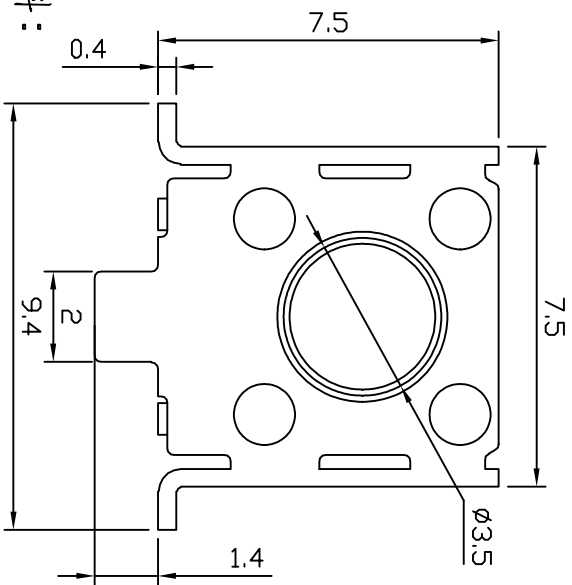

P.C.B LAYOUT

H	对应高度
0.9	4.3h
1.6	5h
2.1	5.5h
2.6	6h
3.1	6.5h
3.6	7h
4.1	7.5h
4.6	8h
5.1	8.5h
5.6	9h
6.1	9.5h
6.6	10h



SPECIFICATIONS:

Operating temperature range: -30°C to +85°C
Rating: 50mA, 12V DC Max
Insulation resistance: 100MΩ min, 100V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100mΩ Max
Life: 100,000 Cycles
Travel: 0.20±0.1mm
Operating force: 250±50gf

材料:

- 本体: PPA (黑色)
- 按钮: PPA (黑色)
- 卡件: 黄铜 (镀银)
- 弹片: 不锈钢 (镀银)
- 盖板: 铁



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

TOLERANCE				DESIGN			
UNLESS OTHERWISE STATED				WYJ			
X.X	±0.20	SIZE	A4	CHKD			
X.XX	±0.15	REV	A	DATE			
X.XXX	±0.10	UNIT	mm	APPD			
SCALE			6:1	DATE			
				TITLE			
				Tact Switch			
				MODEL			
				THCM31-050CB-R			
				SHEET			
				1/3			
				PRINT DATE			
				2025.09.06			