




1		2	3	4	5	6	7	8	9	10
H		对应高度								
3.15		4.3h								
3.85		5h								
4.35		5.5h								
4.85		6h								
5.35		6.5h								
5.85		7h								
6.35		7.5h								
6.85		8h								
7.35		8.5h								
7.85		9h								
8.35		9.5h								
8.85		10h								

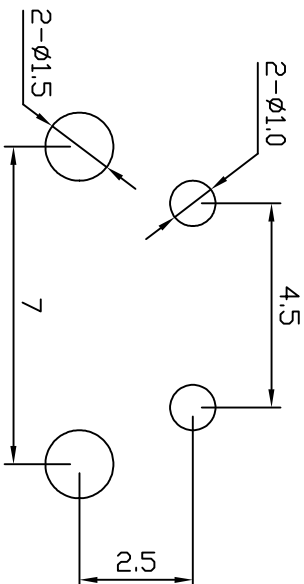



P.C.B LAYOUT

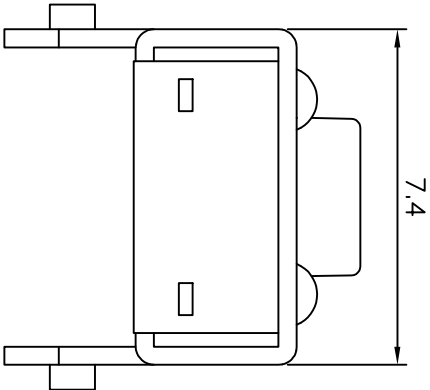

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.



CIRCUIT

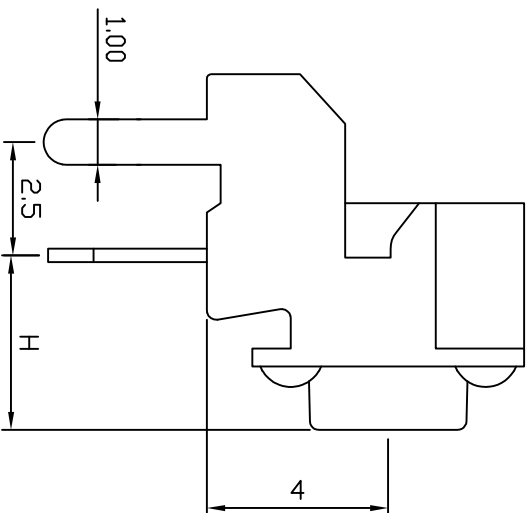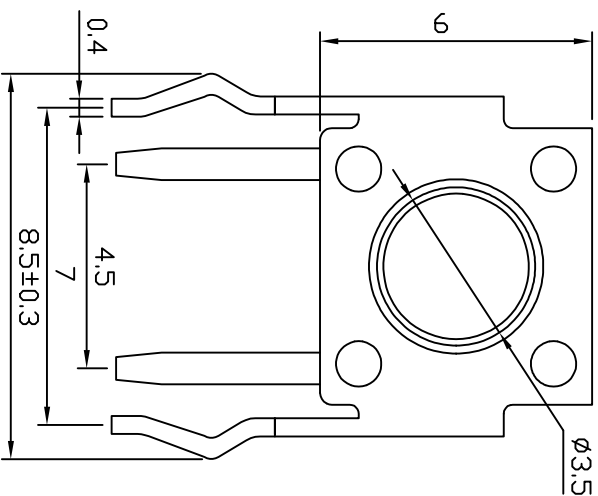

SPECIFICATIONS:

Operating temperature range: -20℃to+70℃
Rating: 50mA, 12V DC Max
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100mΩ Max
Life: 100, 000 Cycles
Travel: 0.20±0.10mm
Operating force: 250±50gf

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.



铭标

2025.11.04

ISSUED



材料:

本体: PA66 (黑色)

按钮: PA66 (黑色)

卡件: 黄铜 (镀银)

弹片: 磷铜 (镀银)

盖板: 铁 (镀铜锡)

TOLERANCE				DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED				CHKD		2025. 11. 04		Tact Switch	
X.X	±0.20	SIZE	A4	APPD		DATE		MODEL	
X.XX	±0.15	REV	A			DATE		THCP77-050CB-B	
X.XXX	±0.10	UNIT	mm			SHEET		1/3	
SCALE			6:1	PRINT DATE		2025.11.04			