

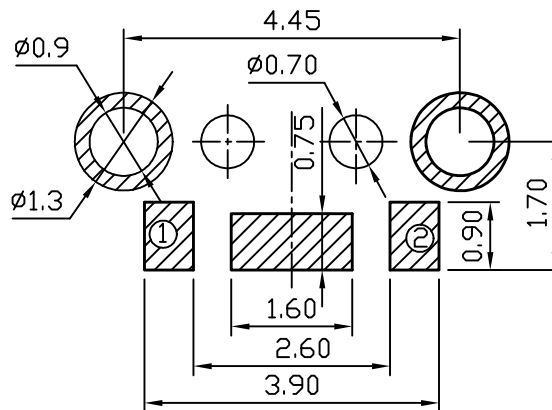
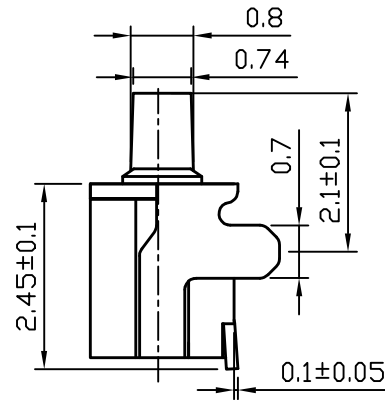
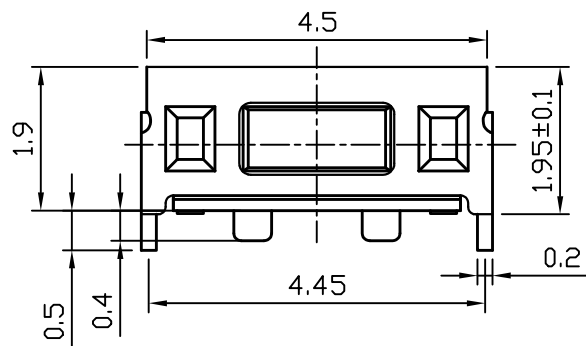


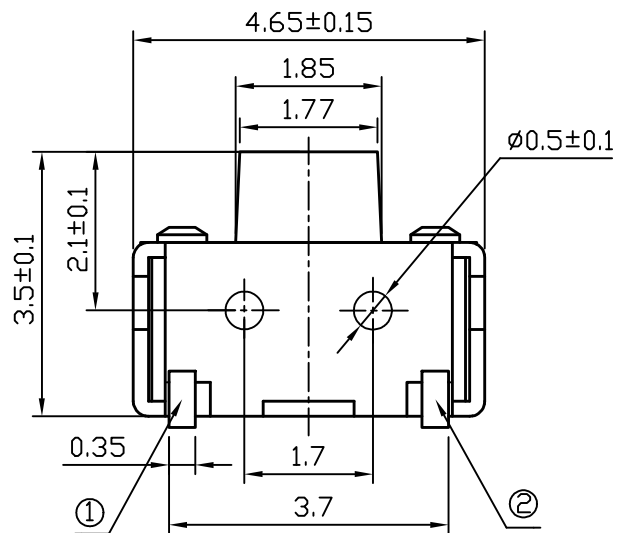

P.C.B LAYOUT

本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.



E	盖板	AC82	黄铜0.2
D	按钮	AD25	LCP(黑)
C	簧片	AE5-4	进口不锈钢覆银
B	底座	AB52	LCP(白)
A	卡件	AA22	磷铜0.15
序号	名称	料号	材料

SPECIFICATIONS:

Operating temperature range:-20°Cto+70°C
Rating:50mA DC 12 V
Insulation resistance:100MΩ min.100V DC
Dielectric strength:250V AC for 1min
Contact resistance:200mΩ Max
Life:30,000 Cycles
Travel:0.2±0.1mm
Operating force:160±50gf



RoHS COMPLIANT				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	
UNLESS OTHERWISE STATED				CHKD	2025.01.04		Tact Switch
X.X	±0.20	SIZE	A4	DATE		MODEL	THBM04-AJ-R
X.XX	±0.15	REV	A	DATE		SHEET	1/3
X.XXX	±0.10	UNIT	mm	DATE		PRINT DATE	2025.07.05
△	±2°	SCALE	10:1				