


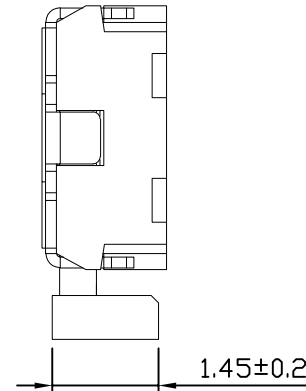
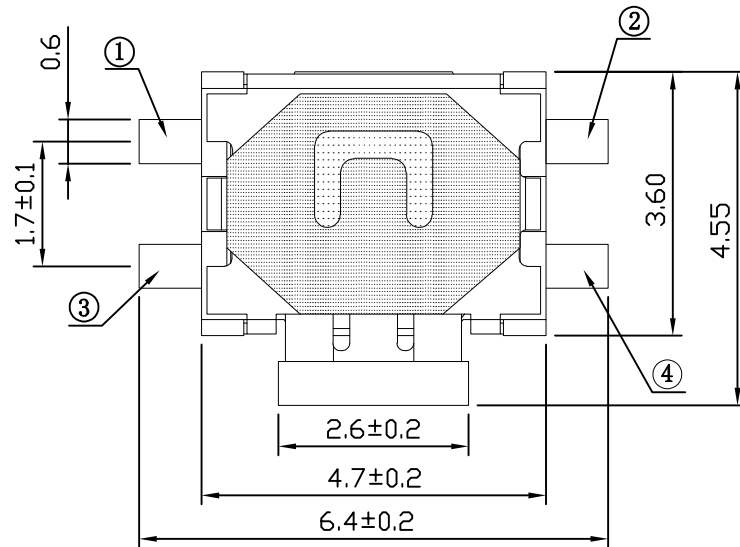



本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

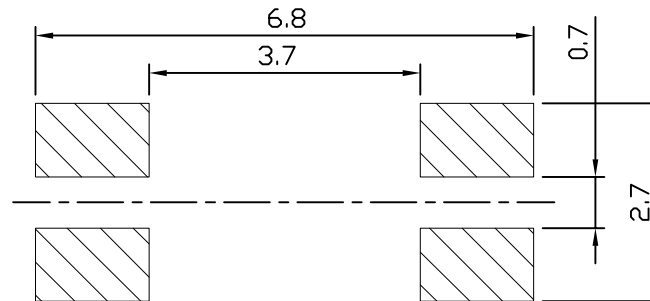

CIRCUIT

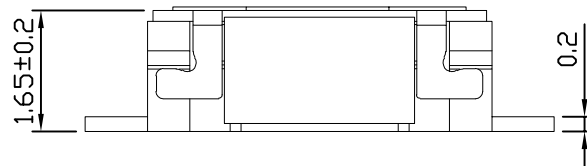

P.C.B LAYOUT

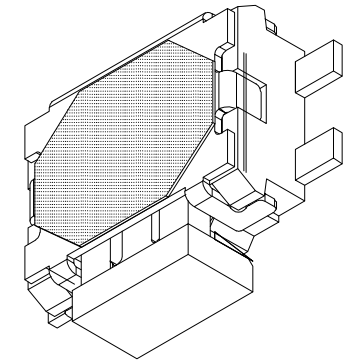

SPECIFICATIONS:

Operating temperature range:-20℃to+70℃
Rating:50mA DC 12 V Max
Insulation resistance:100MΩ min. 250V DC
Dielectric strength:250V AC for 1min
Contact resistance:50mΩ Max
Life:100,000 Cycles
Travel:0.20±0.10mm
Operating force:180±40gf, 250±30gf



 ROHS COMPLIANT  Pb-Free  HF Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.							
TOLERANCE				DESIGN		DATE		TITLE		Tact Switch	
UNLESS OTHERWISE STATED				WYJ		2025. 01. 06					
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL		THBF21-N	
X.XX	±0.15	REV	A								
X.XXX	±0.10	UNIT	mm	APPD		DATE		SHEET		1/3	
	±2°	SCALE	10:1					PRINT DATE		2025.01.22	
										