


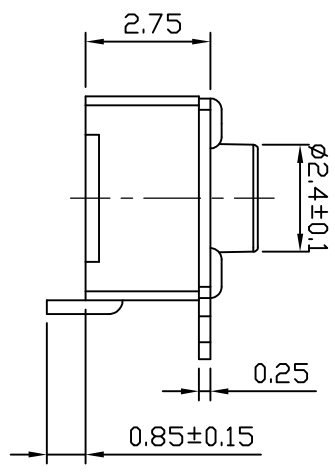
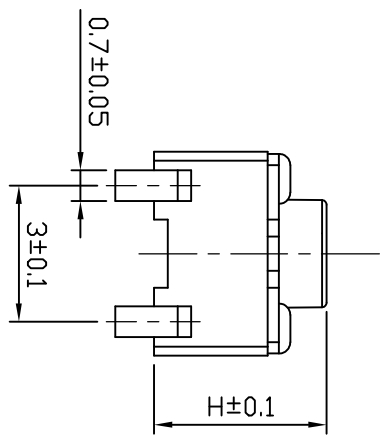



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

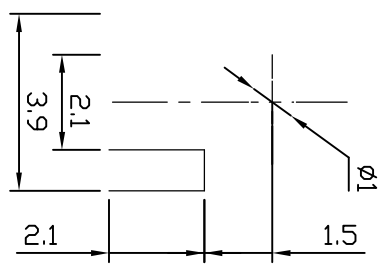

CIRCUIT

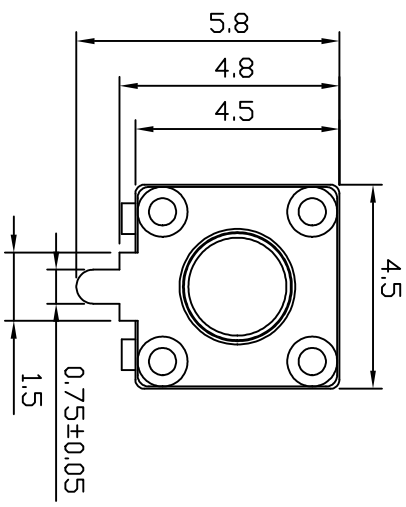

单位: (mm)						
H	3.8	4.3	4.5	4.8	5	5.5 6.0到2.0

SPECIFICATIONS:

Operating temperature range: -20℃ to +70℃
Rating: 50 Ma 12V DC
Insulation resistance: 100MΩ min. 250V DC
Dielectric strength: 250V.AC. 1Min
Contact resistance: 100mΩ Max
Life: 50,000 Cycles
Travel: 0.25±0.05mm
Operating force: 260±50gf



ROHS COMPLIANT Pb-Free Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE UNLESS OTHERWISE STATED				DESIGN WYJ	DATE 2025.08.14	TITLE 4.5前插后贴	
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL THBM39-045CB-R	
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET 1/3	
△	±2°	SCALE	6:1			PRINT DATE 2025.08.14	