



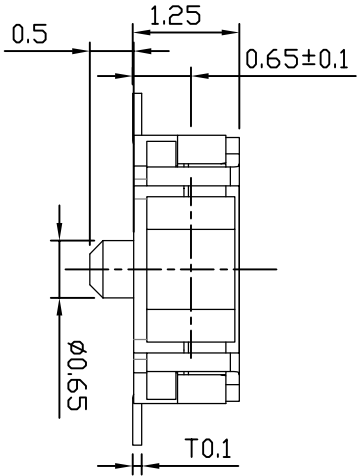


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

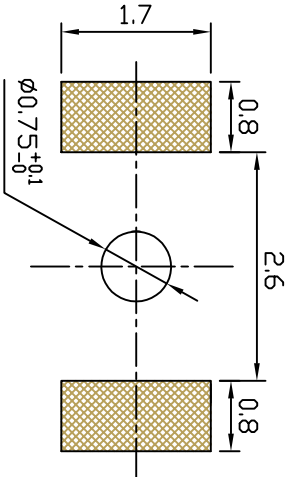

CIRCUIT

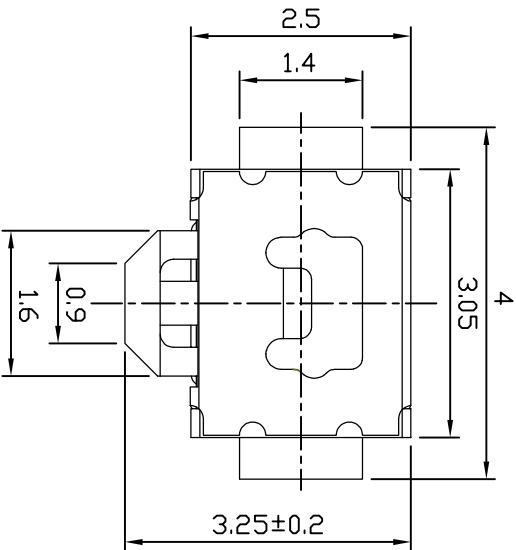

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -20℃ to +85℃
Rating: 50mA DC12V Max
Insulation resistance: 100MΩ min. 250V DC
Dielectric strength: 250V AC, 1min
Contact resistance: 100mΩ Max
Life: 60,000 Cycles
Travel: 0.15±0.05mm
Operating force: 180±50gf



ROHS COMPLIANT Pb Pb-free HF RoHS Compliant				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.							
TOLERANCE				DESIGN		DATE		TITLE		Tact Switch	
UNLESS OTHERWISE STATED				9999		2025. 01. 07					
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL		THBF20	
X.XX	±0.15	REV	A								
X.XXX	±0.10	UNIT	mm								
±	±2°	SCALE	12:1	APPD		DATE		SHEET		1/3	
								PRINT DATE		2025.02.10	
											

按钮	1	黑色	PA46
金属盖子	1	本色	不锈钢
薄膜	1	黄色	聚酰亚胺
簧片	2	本色	不锈钢覆银
基座	1	白色	LCP
端子	2	银白色	磷铜镀银
零部件名称	数量	颜色	材料