

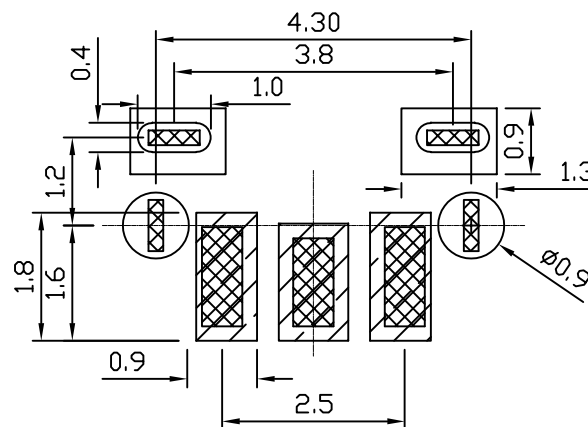
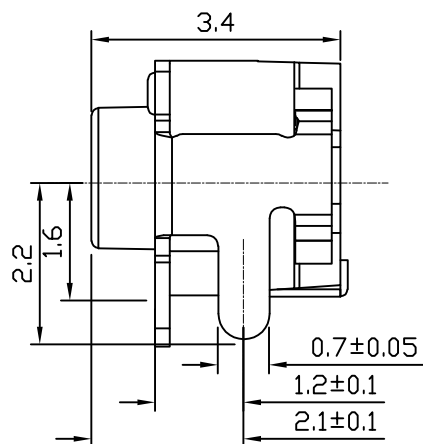
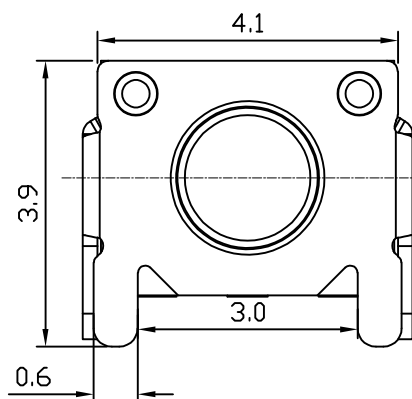
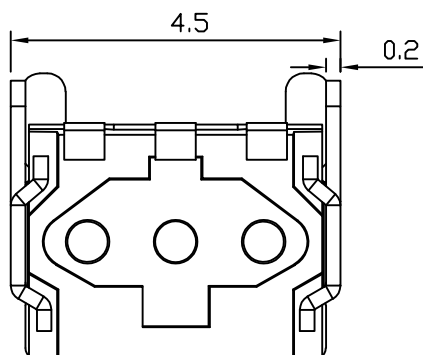


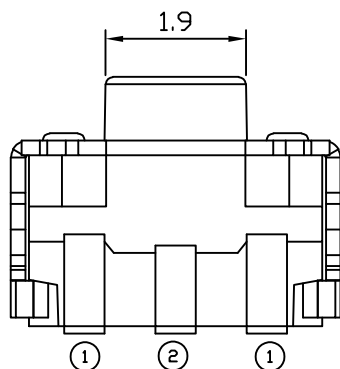

P.C.B LAYOUT



SPECIFICATIONS:

Operating temperature range:-30°C to +70°C

Rating: 50mA, 12V DC Max

Insulation resistance:100M Ω min.100V DC

Dielectric strength:250V AC for 1Min

Contact resistance:100mΩ Max

Life:200,000 Cycles

Travel: $0.20 \pm 0.10 \text{ mm}$

Operating force: $160 \pm 50 \text{ gf}$



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

TOLERANCE				DESIGN	DATE	TITLE	Tact Switch	
UNLESS OTHERWISE STATED				WJG	2024. 04. 01			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	THBM19A-JW34-R	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
	±2°	SCALE	10:1			PRINT DATE	2024.07.06	