

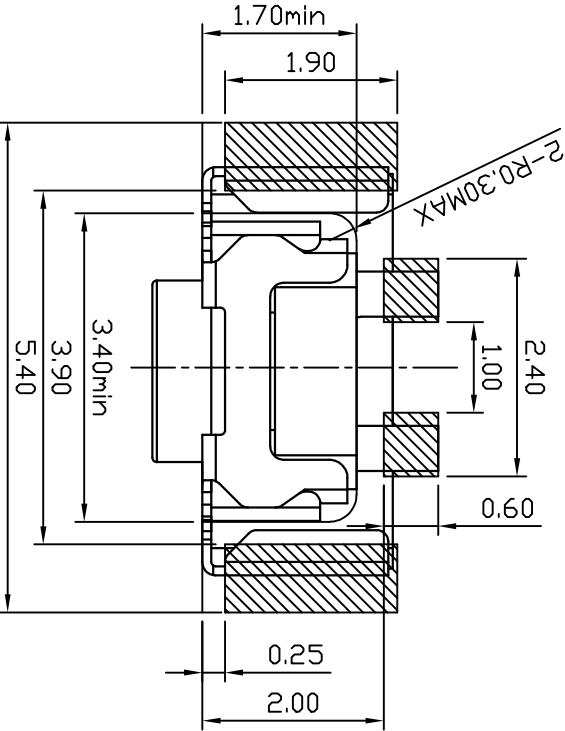
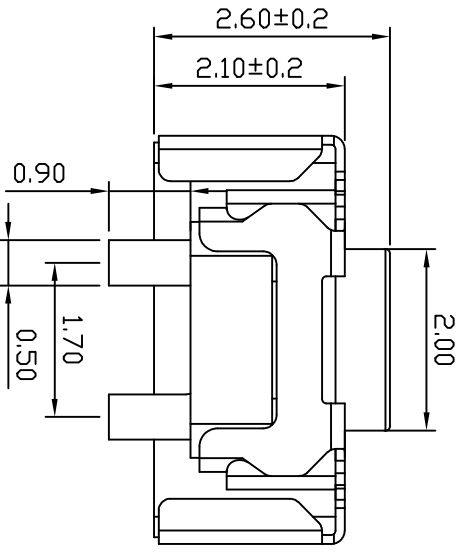
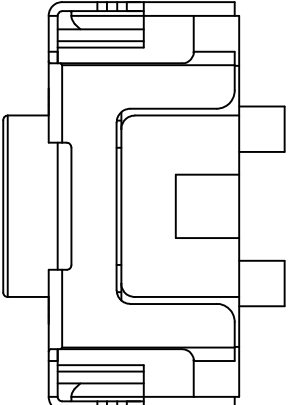


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

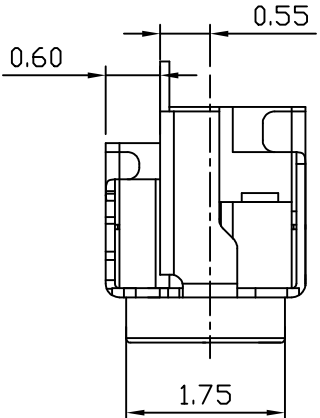

P.C.B LAYOUT

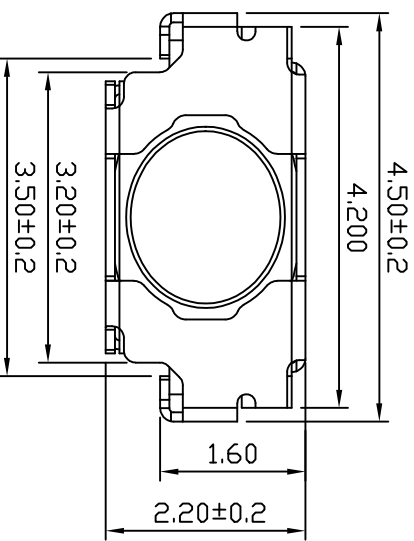

SPECIFICATIONS:

Operating temperature range: -30℃ to +85℃
Rating: 50mA DC 12V Max
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V AC for 1min
Contact resistance: 200mΩ Max
Life: 100,000 Cycles
Travel: 0.15±0.1mm
Operating force: 200±60gf



RoHS COMPLIANT Pb-free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE UNLESS OTHERWISE STATED				DESIGN	DATE	TITLE	
X.X	±0.20	SIZE	A4	CHKD	DATE	2.5*4.5轻触开关	
X.XX	±0.15	REV	A				MODEL
X.XXX	±0.10	UNIT	mm	APPD	DATE		THBM31-BF-R
Δ	±2°	SCALE	12:1			SHEET	1/3
						PRINT DATE	2025.07.05