

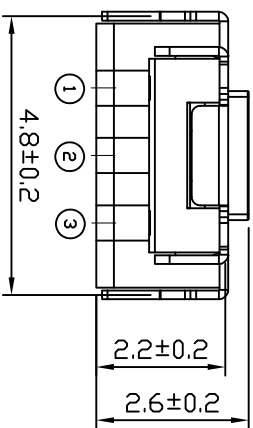

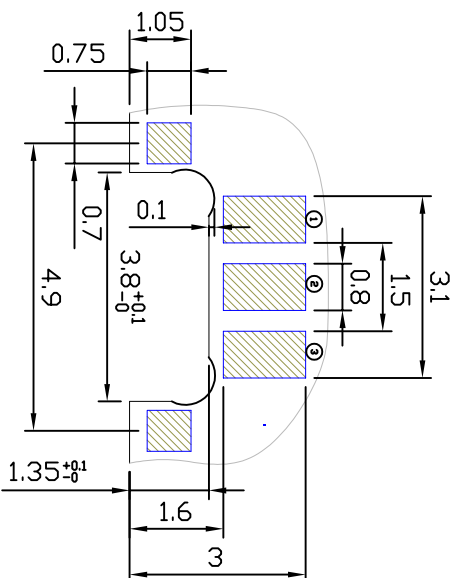
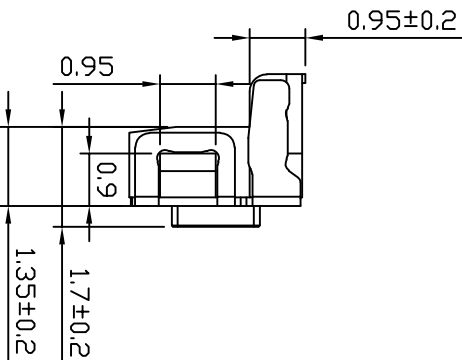


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

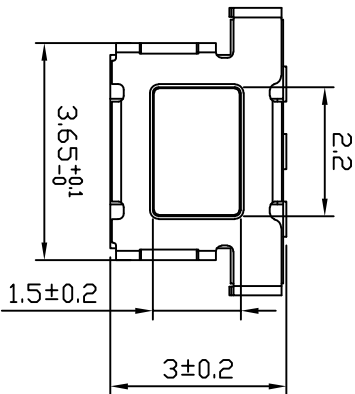

SPECIFICATIONS:

Operating temperature range:-20℃to+70℃
Rating:50mA DC12V Max
Insulation resistance:100MΩ min. 100V DC
Dielectric strength:250V AC. 1Min
Contact resistance:100mΩ Max
Life:100, 000 Cycles
Travel:0.20±0.1mm
Operating force:160±40gf



RoHS COMPLIANT Pb Pb-Free HF Indium Free				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN			
UNLESS OTHERWISE STATED				DATE			
XX	±0.20	SIZE	A4	WYJ	2024. 05. 31		
XX	±0.15	REV	A				
XXX	±0.10	UNIT	mm				
±2°	SCALE	8:1	APPD	DATE	TITLE		
				MODEL	Tact Switch		
				THBM32-BJ-R			