

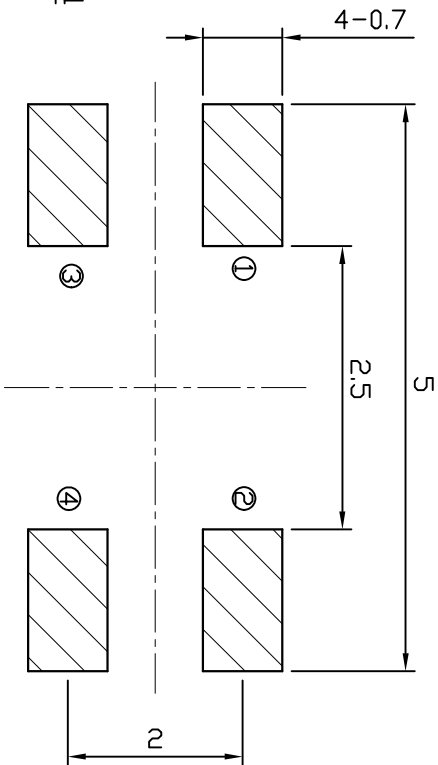



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

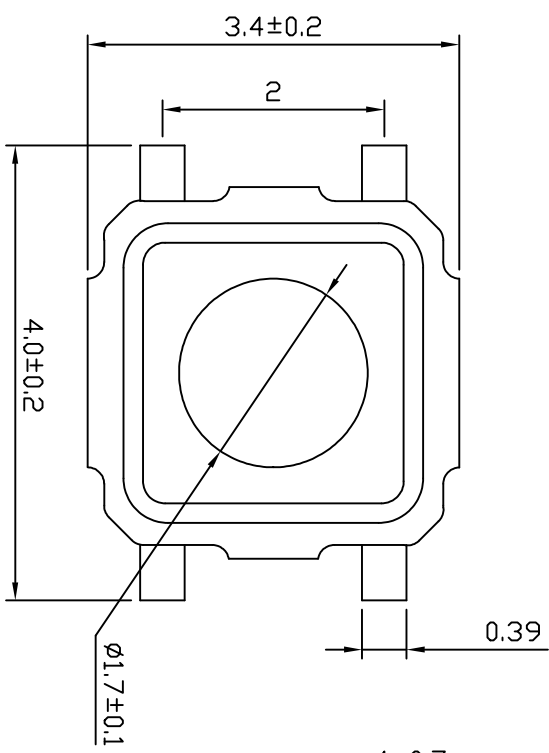

P.C.B LAYOUT



CIRCUIT

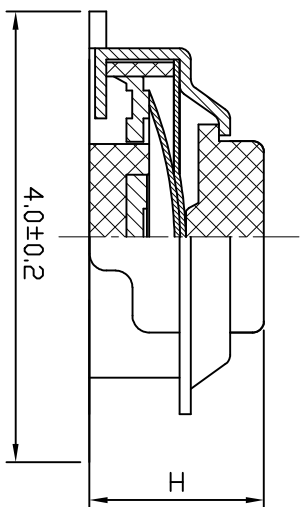

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: Max 50 mA 12V DC Min 10 μ A 1V DC
Insulation resistance: 100M Ω min. 100V DC
Dielectric strength: 250V.AC. 1Min
Contact resistance: 100m Ω Max
Life: 100,000 Cycles
Travel: 0.15 $\pm$ 0.1mm
Operating force: 250 $\pm$ 50gf



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.



H	
1.5	2.0
2.5	

TOLERANCE				DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED				WYJ		2024.03.13		Tact Switch	
X.X	$\pm$ 0.20	SIZE	A4	CHKD		DATE		MODEL	
X.XX	$\pm$ 0.15	REV	A	APPD		DATE		TVBF08-015CB-R	
X.XXX	$\pm$ 0.10	UNIT	mm						
	$\pm$ 2°	SCALE	15:1						
								SHEET	
								1/3	
								PRINT DATE	
								2025.04.24	