


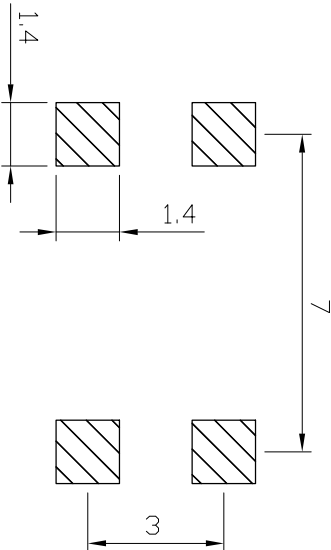
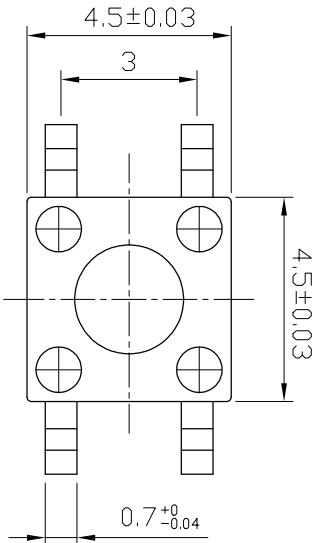


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.



P.C.B LAYOUT

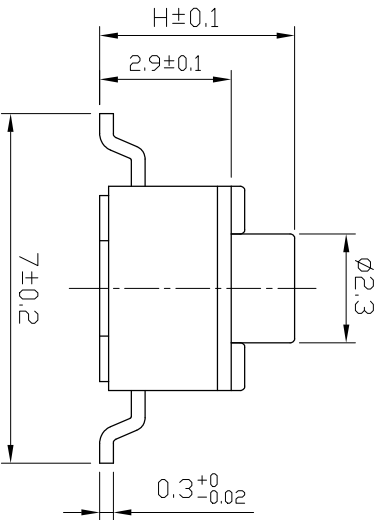

材质: PPA黑色
按钮: 铁/黄铜
盖板: 不锈钢
弹片: 黄铜
端子: PPA黑色
底座: PPA黑色

SPECIFICATIONS:
Operating temperature range:-30℃to+70℃
Rating:50mA, 12V DC
Insulation resistance:100MΩ min, 100V DC
Dielectric strength:250V AC for 1min
Contact resistance:100mΩ Max
Life:100, 000 Cycles
Travel:0.25±0.10mm
Operating force:250±50gf

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.



Rohs COMPLIANT Pb-Free RoHS Free				DESIGN DATE 2025. 11. 07 TITLE Tact Switch			
TOLERANCE				DATE			
UNLESS OTHERWISE STATED				CHKD DATE			
X.X	±0.20	SIZE	A4	MODEL TVBM27-038CB-R-G			
X.XX	±0.15	REV	A	SHEET 1/3			
X.XXX	±0.10	UNIT	mm	PRINT DATE 2025.11.07			
±	±2°	SCALE	6: 1				