


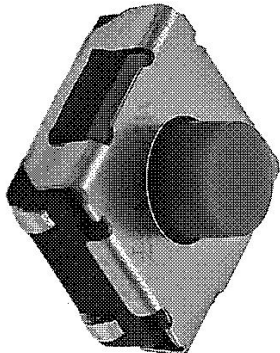
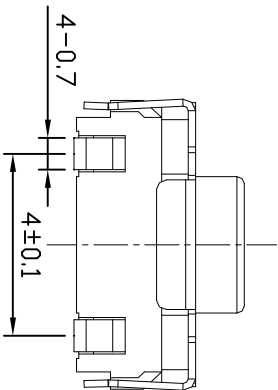
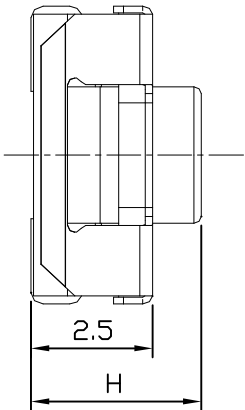
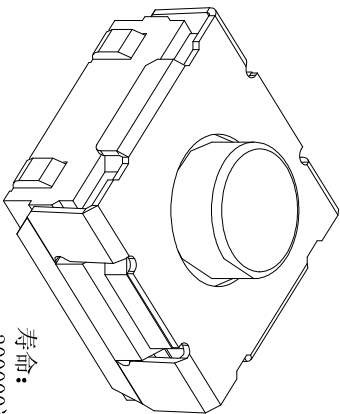


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

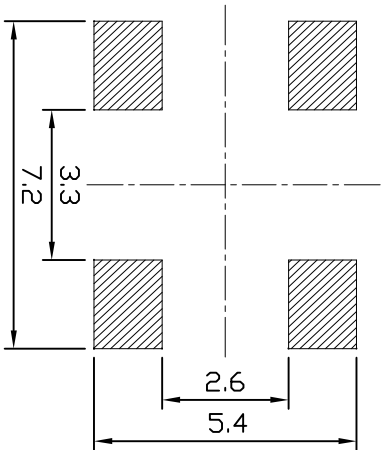

CIRCUIT

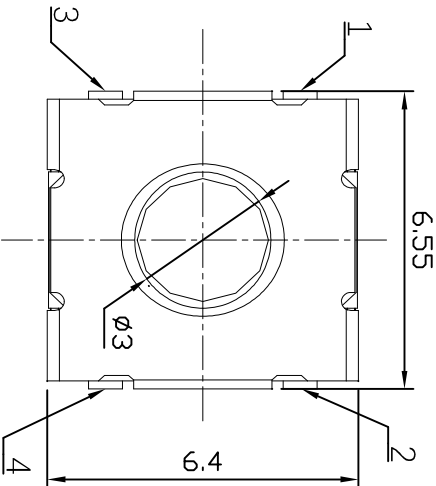

寿命: 300000次
高度H: 力度: ★按钮颜色:

- 25: 2.5H 18: 180g B: 蓝色
- 31: 3.1H 26: 260g Y: 米黄色
- 35: 3.5H * **** W: 白色
- 39: 3.9H
- 43: 4.3H
- 50: 5.0H
- 55: 5.5H

SPECIFICATIONS:

Operating temperature range: -20℃ to +80℃
Rating: 50mA 12V DC Max
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100mΩ Max
Life: 300,000 Cycles
Travel: 0.40±0.20mm
Operating force: 180±50gf



Rohs COMPLIANT Pb-Free				Ming Biao			
TOLERANCE				DESIGN			
UNLESS OTHERWISE STATED				DATE			
X.X	±0.20	SIZE	A4	CHKD	DATE	TITLE	Tact Switch
X.XX	±0.15	REV	A		2025. 05. 19		
X.XXX	±0.10	UNIT	mm	APPD	DATE	MODEL	TVCS52-J-R
±	±2°	SCALE	6:1			SHEET	1/3
						PRINT DATE	2025.07.05