


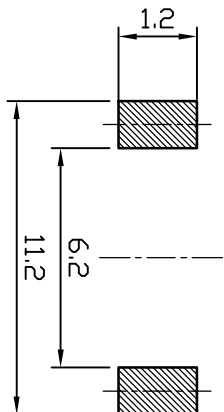
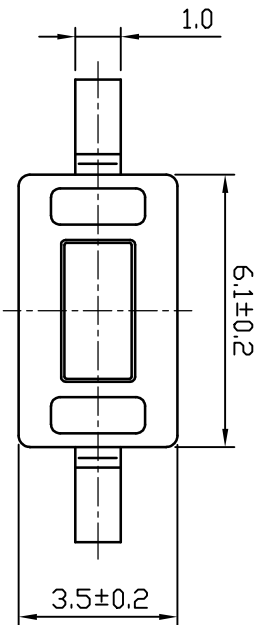


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.



P.C.B LAYOUT

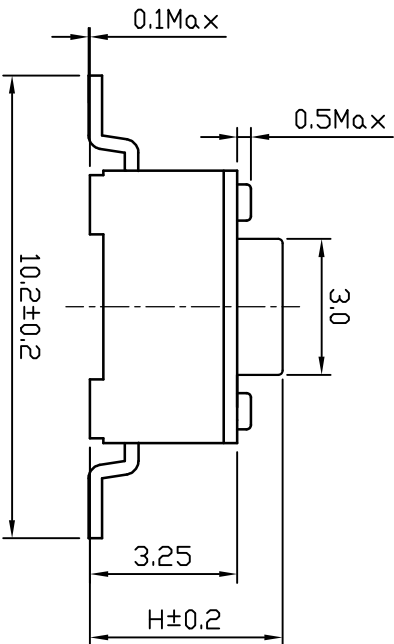

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 100mA, 12V DC Max
Insulation resistance: 100MΩ min, 100V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100mΩ Max
Life: 30,000 Cycles
Travel: 0.25 ± 0.10mm
Operating force: 250 ± 50gf



Rohs COMPLIANT Pb-Free RoHS Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2025. 05. 09		
X.X	±0.20	SIZE	A4	CHKD	DATE		
X.XX	±0.15	REV	A			MODEL	TVCM09-B043CB3-R(K)
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	6:1			PRINT DATE	2025.07.07