
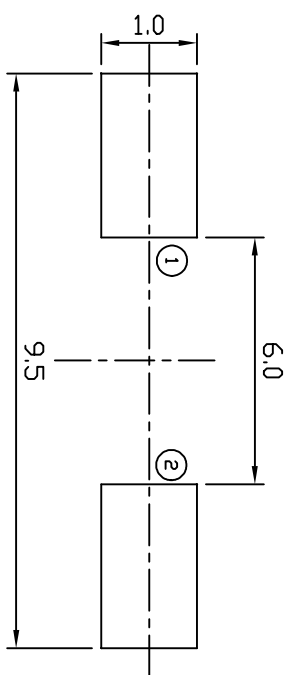
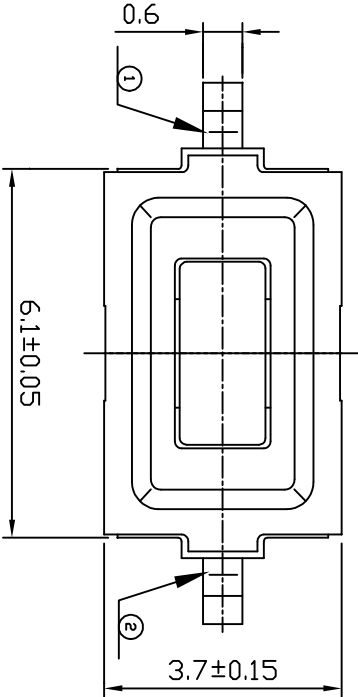

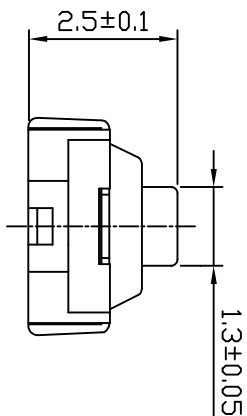


本公司智慧财产未经许可不得复制  
ming biao copyright may not be used without permission from ming biao

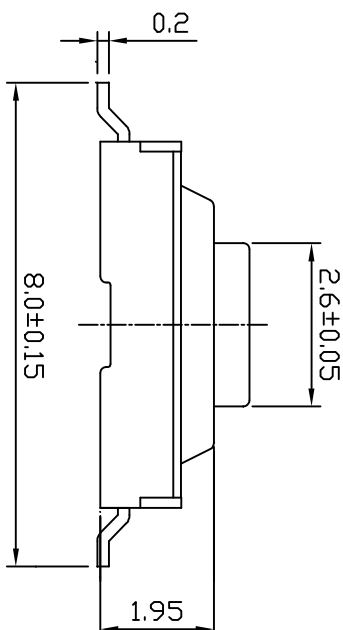

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C  
Rating: 50mA, 12V DC Max  
Insulation resistance: 100MΩ min, 100V DC  
Dielectric strength: 250V AC, 1min  
Contact resistance: 100mΩ Max  
Life: 30,000 Cycles  
Travel: 0.25±0.10mm  
Operating force: 250±50gf



|                                  |       |       |     |                                                            |            |             |              |
|----------------------------------|-------|-------|-----|------------------------------------------------------------|------------|-------------|--------------|
| Rohs COMPLIANT Pb-Free RoHS Free |       |       |     | 东莞市铭标电子科技有限公司<br>Ming Biao Electronic Technology Co., Ltd. |            |             |              |
| TOLERANCE                        |       |       |     | DESIGN                                                     | DATE       | TITLE       |              |
| UNLESS OTHERWISE STATED          |       |       |     | WYJ                                                        | 2024.03.15 | Tact Switch |              |
| X.X                              | ±0.20 | SIZE  | A4  | CHKD                                                       | DATE       | MODEL       | TVC M10-DC-R |
| X.XX                             | ±0.15 | REV   | A   |                                                            |            |             |              |
| X.XXX                            | ±0.10 | UNIT  | mm  | APPD                                                       | DATE       | SHEET       | 1/3          |
| △                                | ±2°   | SCALE | 8:1 |                                                            |            | PRINT DATE  | 2025.06.05   |