

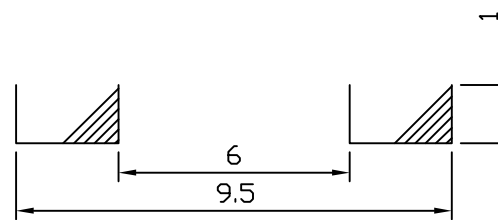
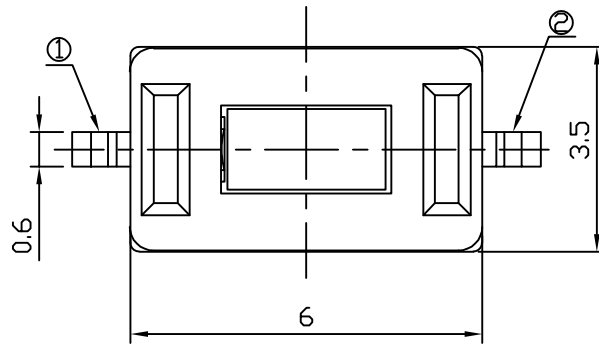




本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

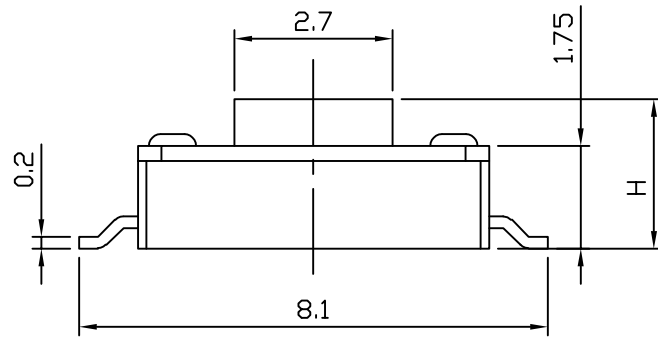


P.C.B LAYOUT

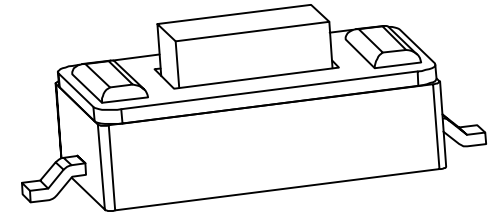

SPECIFICATIONS:

Operating temperature range: -20℃ to +80℃
Rating: 50mA DC 12V Max
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V AC for 1min
Contact resistance: 100mΩ Max
Life: 30,000 Cycles
Travel: 0.20 ± 0.10mm
Operating force: 260 ± 50gf



 ROHS COMPLIANT  Pb-Free  HF Halogen Free				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch	
UNLESS OTHERWISE STATED				WYJ	2024. 12. 30			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVCM14	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
	±2°	SCALE	8:1			PRINT DATE	2025.01.21	