





1	H	
	4.3	4.5
A	5.0	5.5
	6.0	6.5
	7.0	7.3
	7.5	...

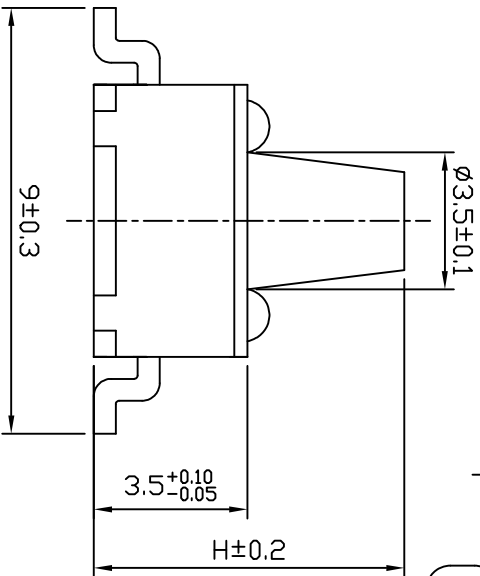

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.



CIRCUIT

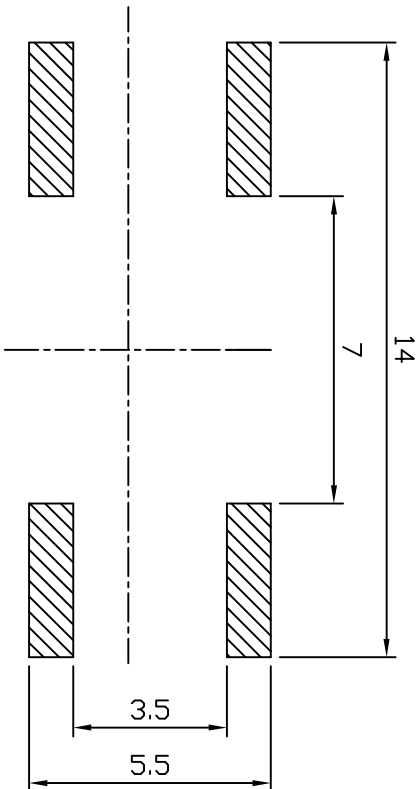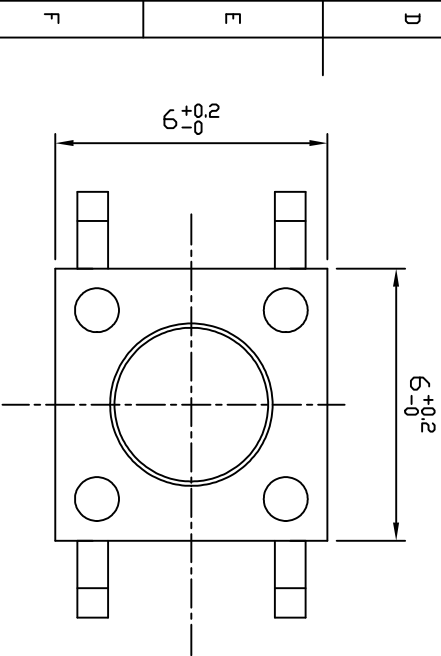

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range:-20℃to+70℃
Rating:50mA, 12V DC Max
Insulation resistance:100MΩ min, 100V DC
Dielectric strength:250V AC for 1Min
Contact resistance:100mΩ Max
Life:100, 000 Cycles
Travel:0.25±0.10mm
Operating force:250±50gf



Rohs COMPLIANT Pb-Free RoHS Compliant				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2025. 10. 27		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVCM27-050CBTS-R-90G
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	6:1			PRINT DATE	2025.10.27