
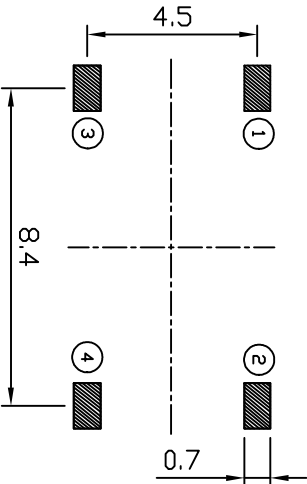
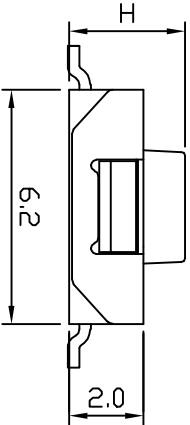

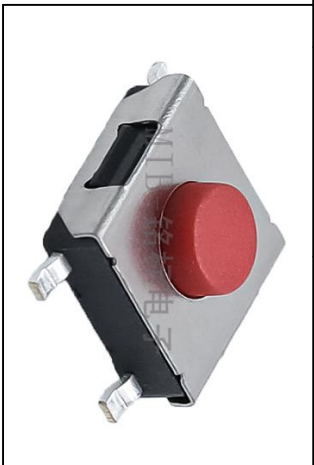



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

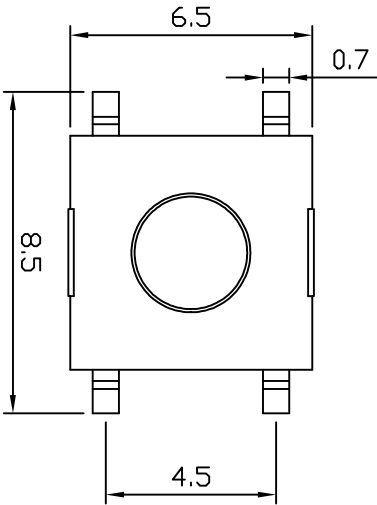

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -20℃to+70℃
Rating: Max50 mA12V DC Min10 μA1V DC
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V. AC. 1Min
Contact resistance: 100mΩ Max
Life: 100, 000 Cycles
Travel: 0. 25±0. 1mm
Operating force: 250±30gf



RoHS COMPLIANT Pb-Free Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2025. 11. 07		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVCNM50-050CR-R
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
	±2°	SCALE	5:1		PRINT DATE		2025.11.07