

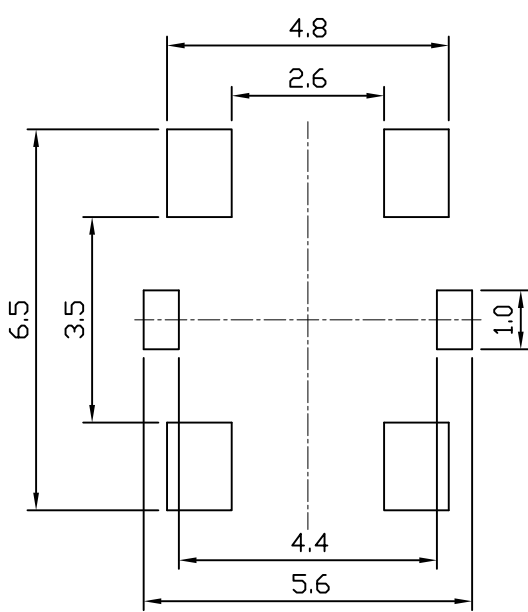
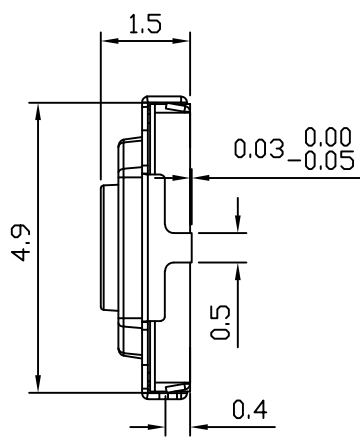
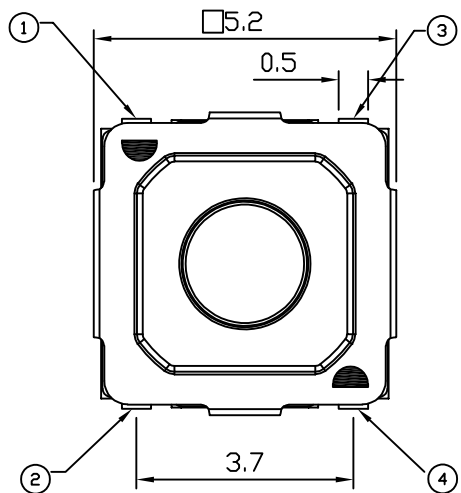



12345678910

A
B
C
D
E
F
G
H



本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

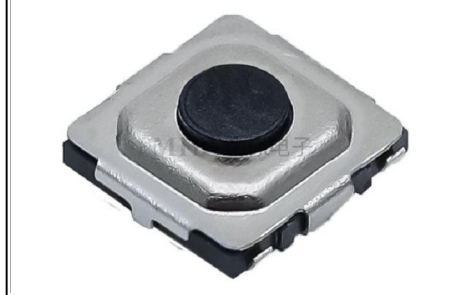


P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -30°C to +70°C
Rating: 50mA 12V DC Max
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V. AC. 1Min
Contact resistance: 100mΩ Max
Life: 1,000,000 Cycles
Travel: 0.20 ± 0.1mm
Operating force: 160 ± 50gf



ROHS COMPLIANT  Pb-Free  Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch	
UNLESS OTHERWISE STATED					2024. 04. 15			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVCU23-015JL-R	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
	±2°	SCALE	8:1			PRINT DATE	2024.06.28	