


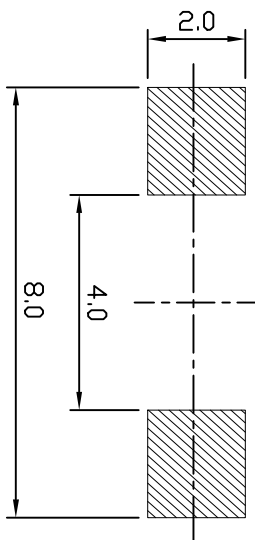
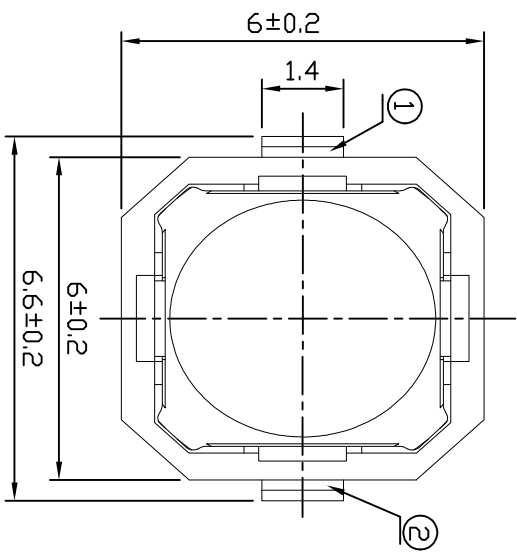


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

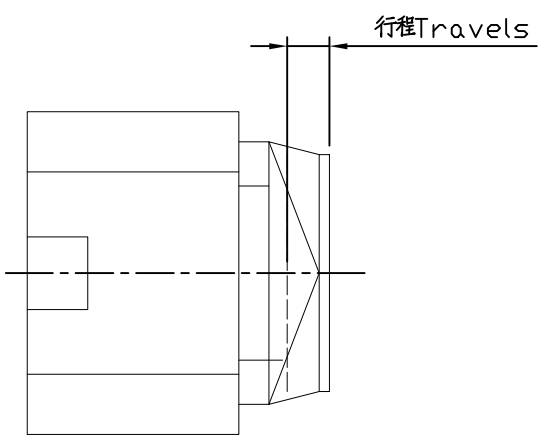

CIRCUIT

P.C.B LAYOUT

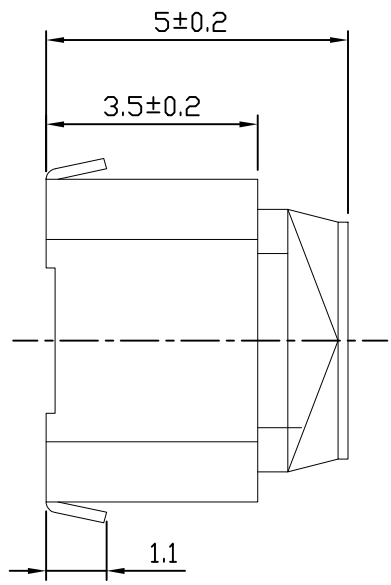

SPECIFICATIONS:

Operating temperature range:-40℃to+85℃
Rating:50mA DC 12 V Max
Insulation resistance:100MΩ min. 100V DC
Dielectric strength:250V AC for 1min
Contact resistance:100mΩ Max
Life:100, 000 Cycles
Travel:1.30±0.3mm
Operating force:250±50gf

REFERENCE DRAWING



Rohs COMPLIANT Pb-free RoHS Compliant				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2025. 01. 06		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVCU31-050CB-R
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	8:1			PRINT DATE	2025.04.18