


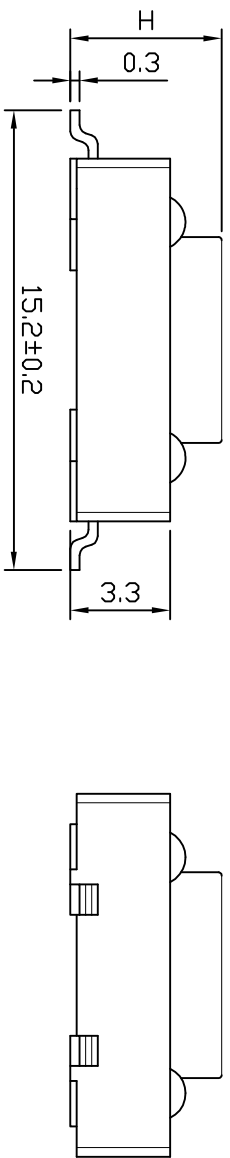



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

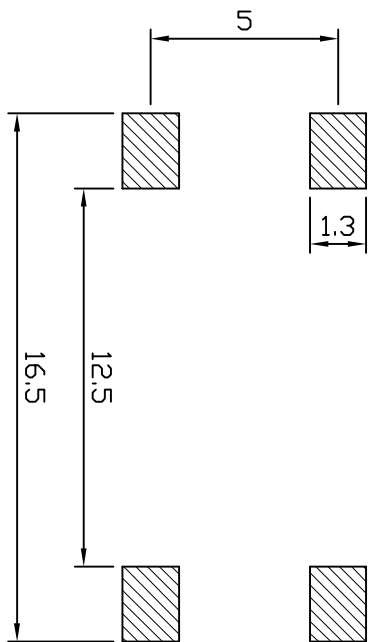

H
4.3
4.5
5.0
5.5
6.0
...
14.0

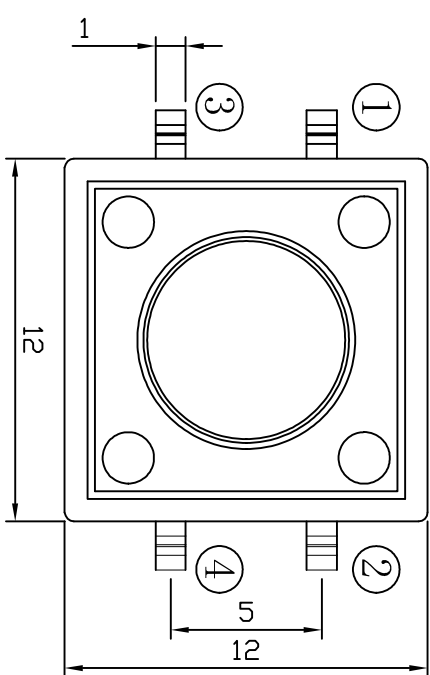

材料:
本体: PPA (黑色)
按钮: PPA (黑色)
卡件: 黄铜 (镀银)
弹片: 不锈钢 (镀银)
盖板: 铁/铜 (镀铜锡)

SPECIFICATIONS:

Operating temperature range:-20°Cto+70°C
Rating:50mA DC12V Max
Insulation resistance:100MΩ min. 100V DC
Dielectric strength:250V.AC. 1Min
Contact resistance:100mΩ Max
Life:200, 000 Cycles
Travel:0.35±0.1mm
Operating force:260±40gf



Rohs COMPLIANT Pb-free RoHS Compliant				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2025. 09. 18		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVDM01-140JB-R(Y)
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
Δ	±2°	SCALE	4:1			PRINT DATE	2025.09.18