
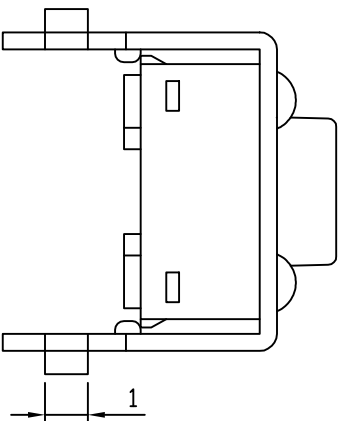
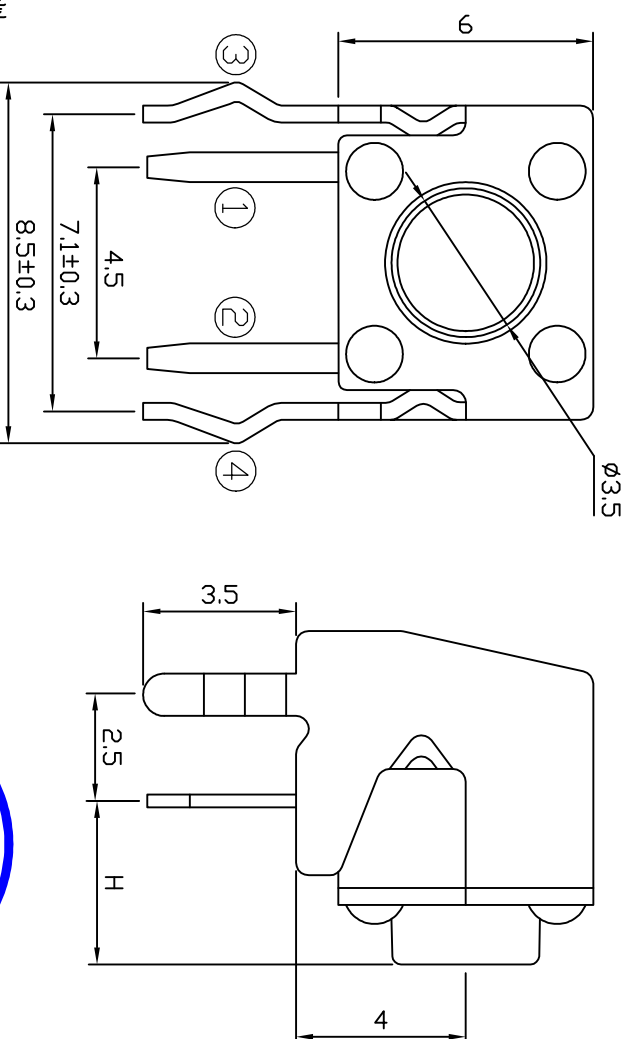


H	对应高度
3.15	4.3h
3.85	5h
4.35	5.5h
4.85	6h
5.35	6.5h
5.85	7h
6.35	7.5h
6.85	8h
7.35	8.5h
7.85	9h
8.35	9.5h
8.85	10h
.....	
13.85	15h



SPECIFICATIONS:

Operating temperature range: -20°C to $+70^{\circ}\text{C}$
 Rating: 50mA, 12V DC Max
 Insulation resistance: $100\text{M}\Omega$ min., 100V DC
 Dielectric strength: 250V AC for 1min
 Contact resistance: $100\text{m}\Omega$ Max
 Life: 100,000 Cycles
 Travel: $0.25 \pm 0.1\text{mm}$
 Operating force: $160 \pm 50\text{gf}$

材料:

本体：PPA（黑色）
按钮：PPA（黑色）
卡件：黄铜（镀银）
弹片：不锈钢（镀银）
盖板：SPCC



RoHS COMPLIANT   Pb-free Halogen Free				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	
UNLESS OTHERWISE STATED				WYJ	2025. 01. 07	Tact Switch	
XX	±0.20	SIZE	A4	CHKD	DATE	MODEL	THCP38-050JB-B
XXX	±0.15	REV	A				
XXXX	±0.10	UNIT	mm				
A	±2°	SCALE	6:1	APPD	DATE	SHEET	1/3
						PRINT DATE	2025.04.09
							