


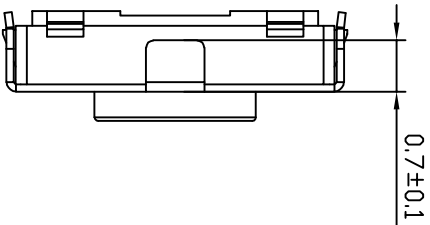
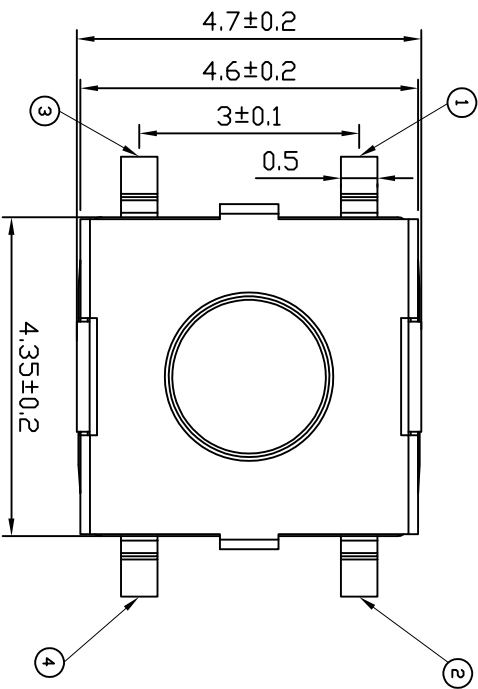


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

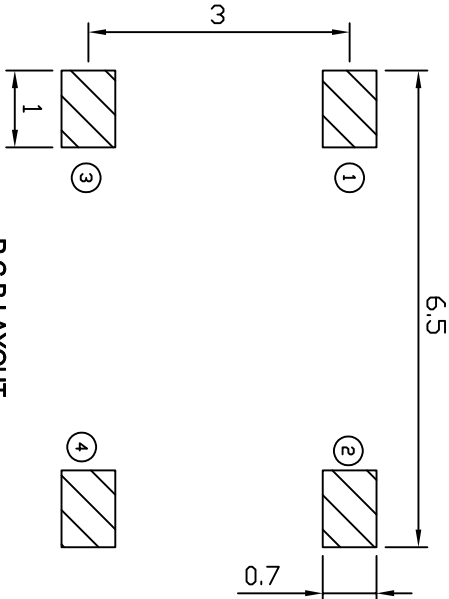

CIRCUIT

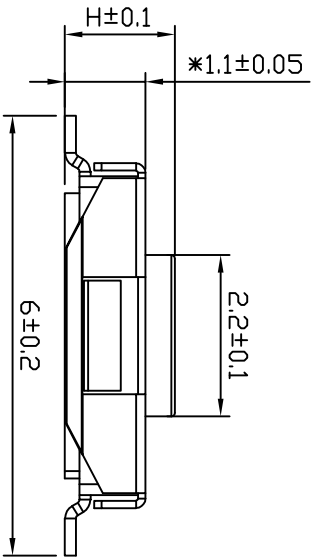

P.C.B LAYOUT

H	
1.5	2.0
2.5	

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 50mA DC12V Max
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V.AC. 1Min
Contact resistance: 100mΩ Max
Life: 100,000 Cycles
Travel: 0.20±0.10mm
Operating force: 160±40gf



ROHS COMPLIANT Pb Pb-free HF RoHS Free				Ming Biao 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	
UNLESS OTHERWISE STATED				WYJ	2024.03.11	Tact Switch	
XX	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVBM29-J-R
XXX	±0.15	REV	A				
XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
	±2°	SCALE	10:1			PRINT DATE	2025.01.22