

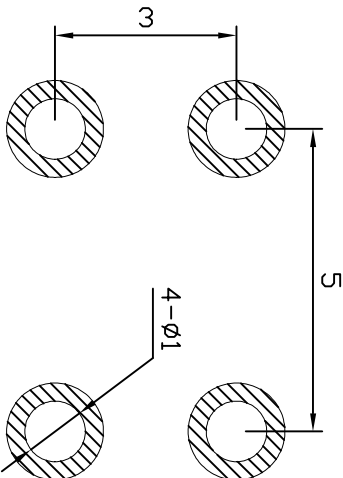


H
3.5
3.8
4.3
4.5
5.0
5.5
6.0
6.5
7.0


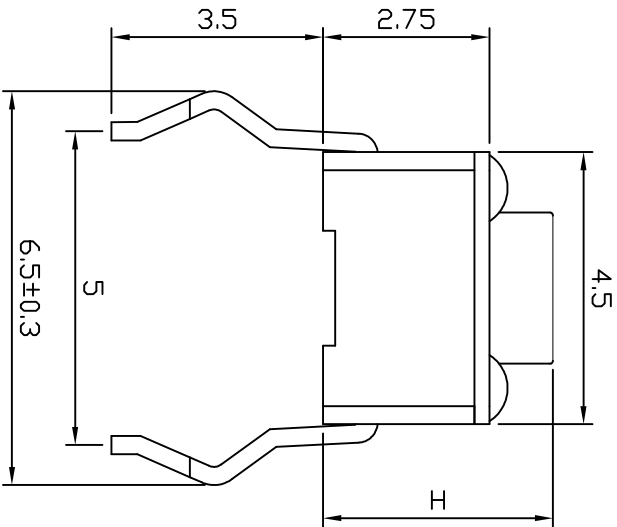


PCB LAYOUT



CIRCUIT

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

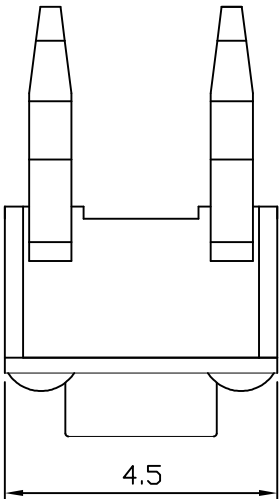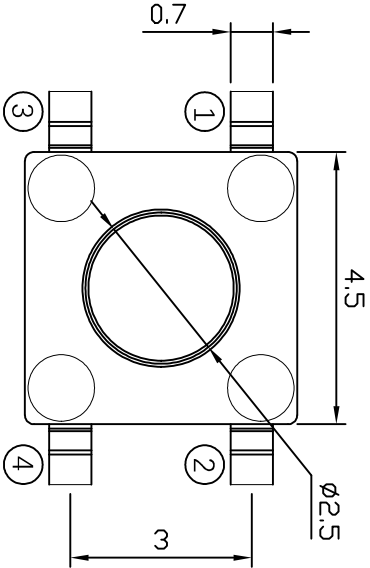

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 50mA, 12V DC Max
Insulation resistance: 100MΩ min, 100V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100mΩ Max
Life: 50,000 Cycles
Travel: 0.25±0.10mm
Operating force: 260±40gf

材料:

- | | | |
|-----|-----|-------|
| 本体 | PPA | (黑色) |
| 按钮 | PPA | (黑色) |
| 卡件: | 黄铜 | (镀银) |
| 弹片: | 不锈钢 | (镀银) |
| 盖板: | 黄铜 | (镀铜锡) |



RoHS COMPLIANT Pb-Free Halogen free				 东莞市铭标电子科技有限公司 Ming Bao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	
UNLESS OTHERWISE STATED				WYF	2025.01.07	Tact Switch	
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVBP27-050CB-R
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm				
	±2°	SCALE	8:1	APPD	DATE	SHEET	1/3
						PRINT DATE	2025.05.20
							