

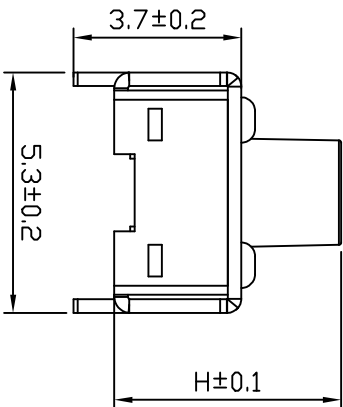





H	
3.5	3.8
4.3	4.5
5.0	5.5
6.0	6.5
.....	
10.0	10.5

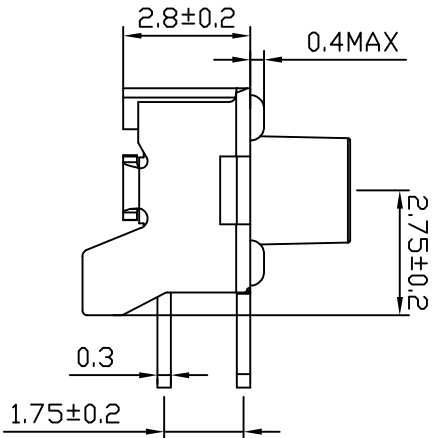

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.



CIRCUIT

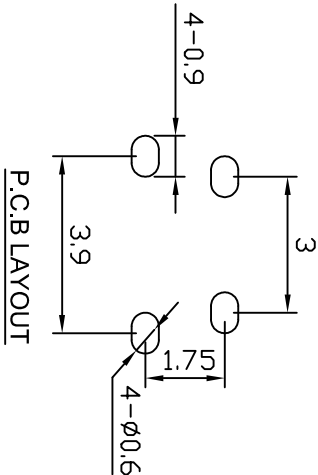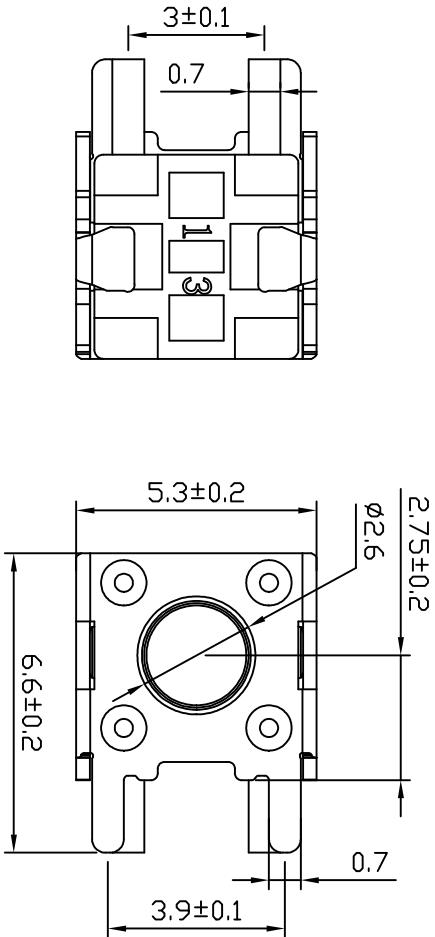

SPECIFICATIONS:

Operating temperature range:-20℃to+70℃
Rating:50mA, 12V DC Max
Insulation resistance:100MΩ min. 250V DC
Dielectric strength:250V AC, 1Min
Contact resistance:100mΩ Max
Life:100, 000 Cycles
Travel:0.20±0.10mm
Operating force:160±40gf



ROHS COMPLIANT Pb-free Halogen free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2025. 01. 18		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVBT27-J-R
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	6:1			PRINT DATE	2025.05.22